

YZJ系列渣浆泵泵



杭州德士比泵有限公司是全国标准化技术委员会排灌设备委员单位，1993年创立杭州清水水泵总厂，小型潜水电泵制造商、出口商，水泵行业标准的起草单位之一。拥有行业内认定的工程研究中心，实践教学基地，始终专注于全系类泵产品的研发设计，制造销售及服务。工厂坐落于浙江杭州钱江经济开发区，地理位置优越，交通十分便利。

德士比始终致力于科技和管理的创新，一直视质量为企业的生命，通过完善的管理体系、领先的水泵技术和生产工艺以及先进的测试系统，为用户提供技术领先的水泵。同时我们非常注重和客户的沟通，不断改进产品的设计和性能，从而保持和客户的长期合作伙伴关系。

“为客户提供所需求并运行稳定、高效的水泵及最佳解决方案”是德士比的企业核心理念之一。无论是怎样的流量、扬程或输送介质，德士比都能够为您的需求提供合适的泵。

德士比始终力争使产品更加好用、节能、高效从而使客户从中受益，也使环境更加美好。德士比水泵的生产过程严格遵循ISO和环保标准。


德士比每台水泵都经过非常严格的测试，在世界各地，成千上万台德士比水泵装置在运行中都表现的非常出色。



目 录

Contents


■ 型号说明、特点、用途	1
■ 材质、供货范围、定货须知	2
■ 性能参数表	3-4
■ 清水性能表	5-14
■ 结构图	15
■ 外形及安装尺寸	16-26

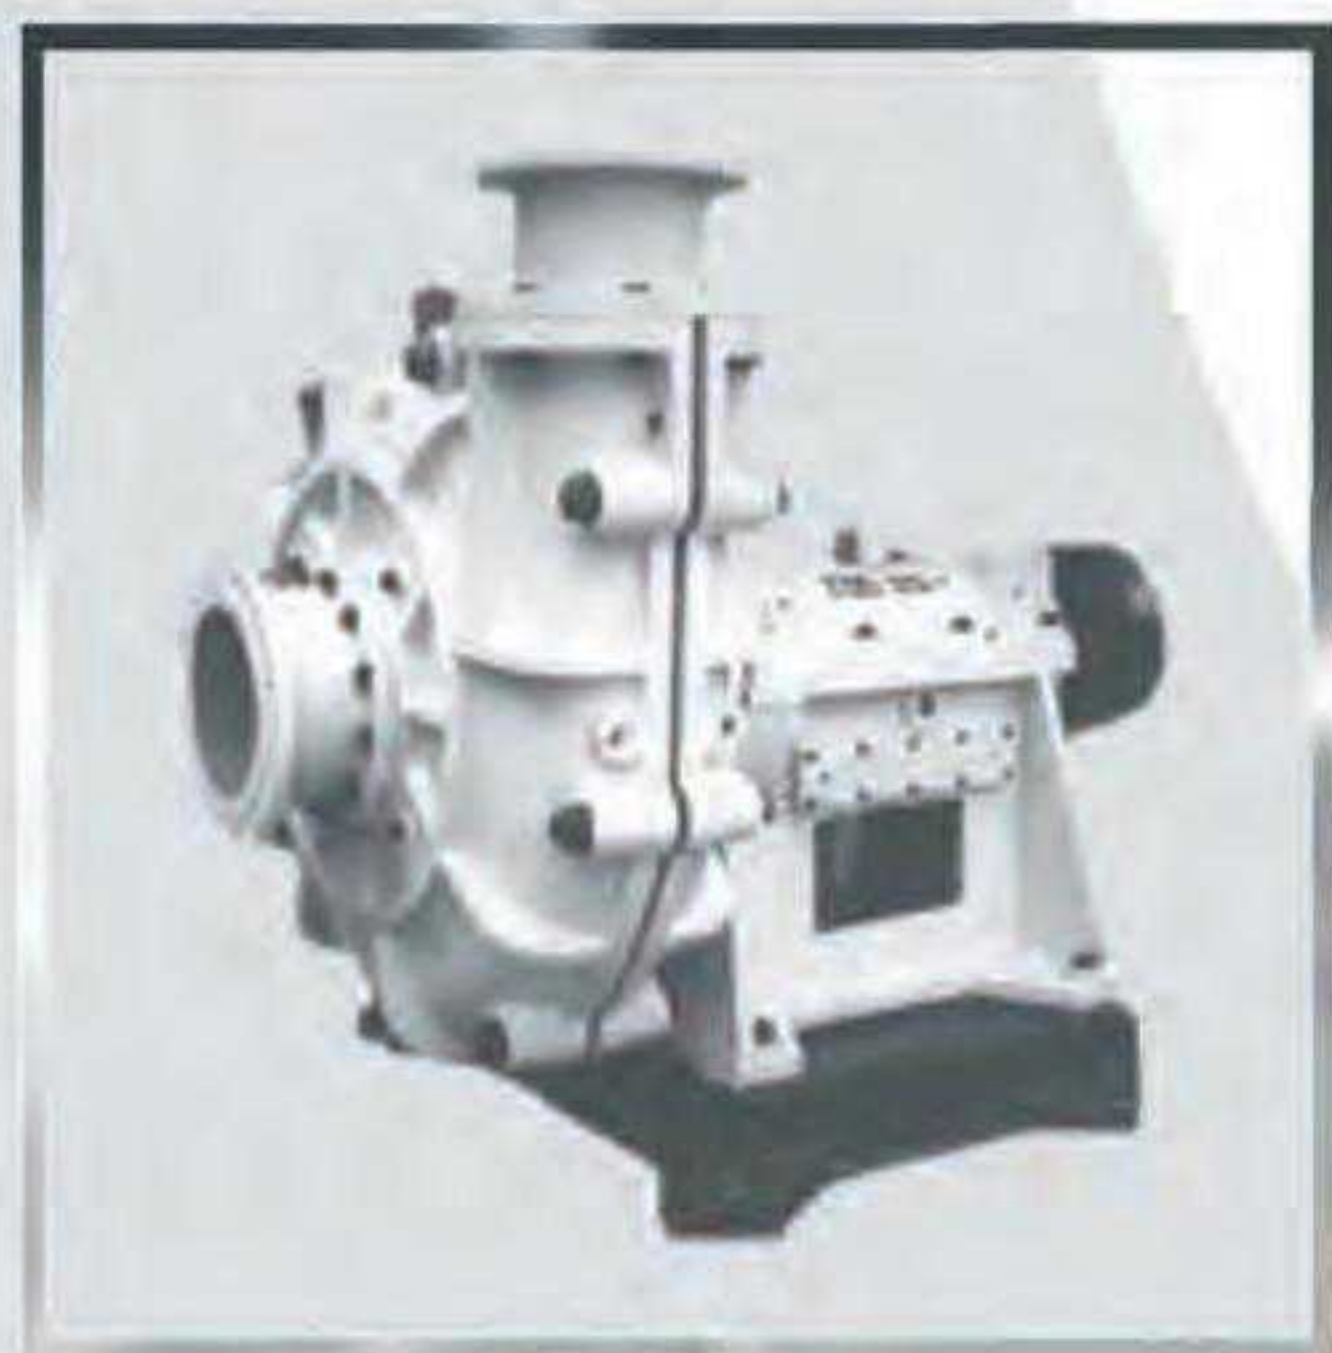

型号说明 DEFINITION



代 号 (symbol)	A	B	C	D	E	F	G	...
叶片数目 (Number of vanes)	5	4	3	2	1	6	7	...

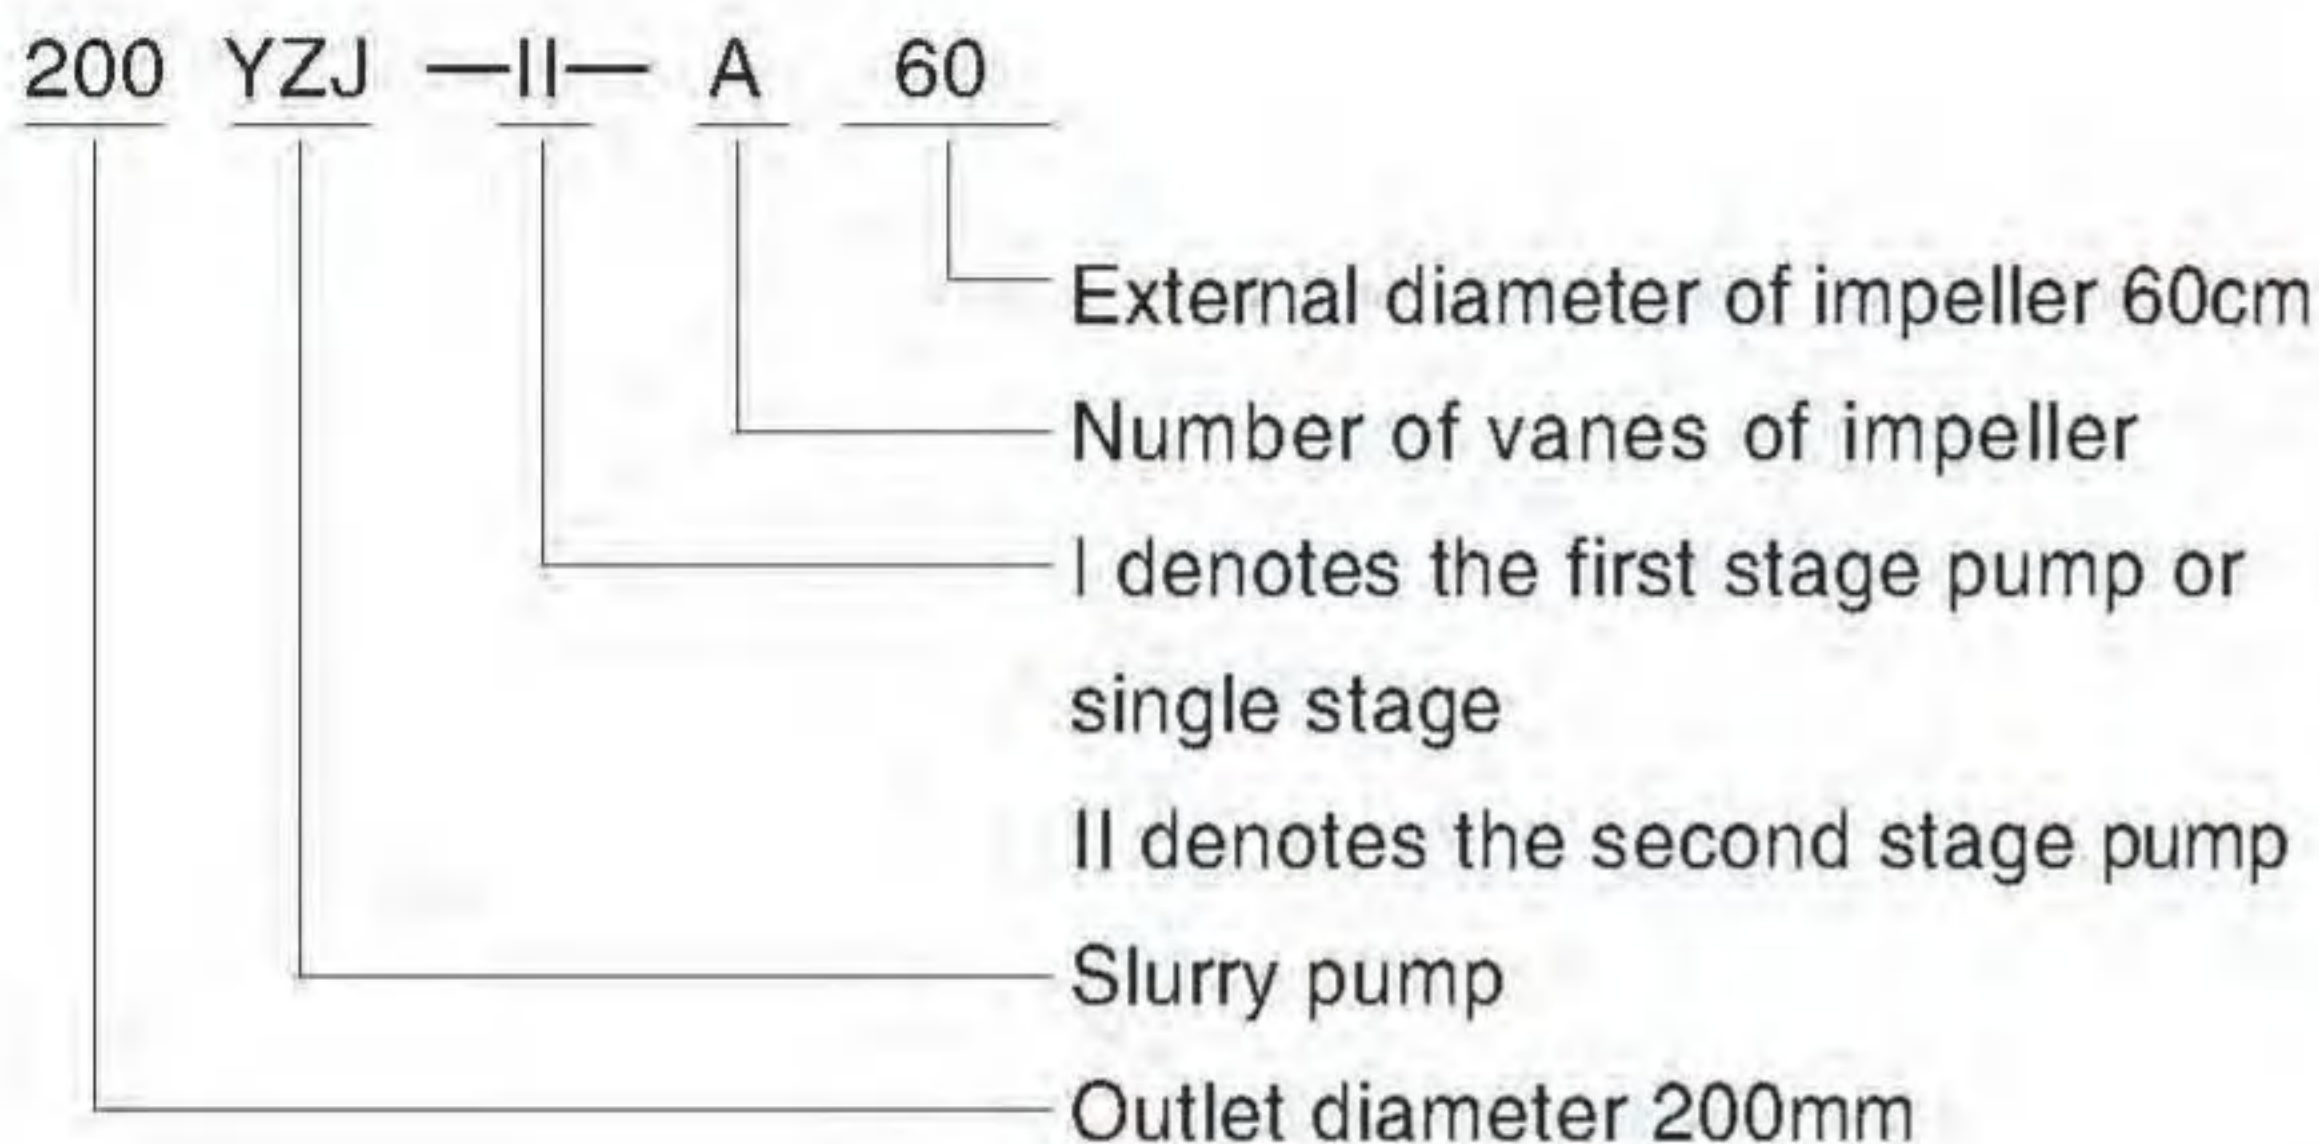

用途 APPLICATIONS

适用于冶金、矿山、煤炭、电力、建材等工业部门输送磨蚀性或腐蚀性渣浆。

It can be widely used for handing the mixture contained of abrasive and corrosive solid in eletric power, metallurgy, mine, coal, constructional material industry departments.

特点 FEATURES

1. 泵体视需要采用双层泵壳（内外双层金属结构或外层金属、内层橡胶）和单层泵壳（单层壳体 金属结构）；
2. 双层泵外壳结构为垂直中开式，出水口位置可按45° 间隔，旋转8个不同位置安装使用；
3. 结构先进；托架前后轴封采用金属组件密封。密封可靠性高，寿命长。
4. 高效节能。

1. Use of Double casing(double metal casings,or internal rubber casings)and single case(single-case metal casing) according to requirement.
2. Double casing centrally split in vertical direction.Discharge port can be positioned at 8 different position at an interval of 45° .
3. Advanced structure.
4. Efficient energy saving.

材质 MATERIALS

零件名称 Parts Name	材料名称或牌号 Materials Name and Mar	标准代号 Standard Code Number
轴承体 Bearing body 托架 Bracket 双壳泵的泵体、泵盖 Bivalved pump body, pump bonnet	HT200	GB 9439
	QT450-10、QT500-7	GB 1348
	ZG230-450、ZG270-500	GB/T 11352
叶轮 Vane wheel 护套、护板 Guard jacket, guard board 单壳泵的泵体、护板 Single barrel pump body, guard board	耐磨1#-8# Anti-friction 1#---8#	GB 8263
副叶轮、减压盖 Auxiliary vane wheel, pressure reducing cap	HT200	GB9439
	QT450-10、QT500-7	GB1348
	不锈钢 耐酸钢 Stainless acid resistant steel	GB2100
轴 Axle	45	GB699
	40Cr	GB3077
轴套 Axle sleeve	45 表面镀铬 Surface chromium plating	GB699
	3Cr13	GB/T1220

供货 范围 SUPPLY ARRANGE

泵工作部、底座、传动部、动力机、启动装置（选装）。

Pump head, bracket, bottom, drive, moving force, starting device (can select).

订货须知 ORDER INSTRUCTION

- 用户在订货（或签订技术协议）时，请注明：
- 1、使用工况：流量、扬程、浆体浓度及比重、粒径、吸入形式、传动方式等；
 - 2、配套电机：型号、主要技术参数、防护等级、生产厂家等；
 - 3、其它配套项目：如泵的备件、专用工具、调速装置等；
 - 4、其它特殊要求。

Please note the following items when an order is placed or a technical agreement is reached:

- 1. Operating performance required: Capacity, head, concentration, density and size of solids handled, suction and driving modes.
- 2. Associated motor: Model, main technical parameters, protection class and manufacturer.
- 3. Others: spare parts for pump, special tools and speed-regulating mechanism.
- 4. Other special requirement.



性能参数表 PERFORMANCE CHART

型号 TYPE	允许配带 最大功率 ALLOWABLE MATING MAX. POWER (KW)	清水性能 CLEAR WATER PERFORMANCE					间断通过 最大粒度 PARTICLE MAX. SIZE HANDLED OCCASIONALLY (mm)	泵重 PUMP WEIGHT (kg)
		流量 Q CAPACITY (m³/h)	扬程 H HEAD (m)	转速 n SPEED (r/min)	最高效率 η MAX. EFF. (%)	汽蚀余量 (NPSH) r (m)		
40YZJ-A17	7.5	4-23	9.0-44.6	1400-2900	52.4	2.5	11	121(127)
40YZJ-A19	15	8-35	12.8-57.1	1430-2930	58.8	1.3	11	173
50YZJ-A33	18.5	12-54	7.7-42.5	700-1480	42.1	2.9	13	537(545)
50YZJ-A46	55	23-94	17.9-85.8	700-1480	42.1	2.9	13	1082(992)
50YZJ-A50	90	27-111	22.3-110.7	700-1480	44.7	1.4	14	1378
65YZJ-A27	11	20-71	6.0-28.2	700-1480	45.1	3.0	13	500(508)
65YZJ-A30	15	23-79	7.4-34.8	700-1460	63.5	2.0	19	504(512)
80YZJ-A33	37	43-174	8.0-43.2	700-1480	65.7	2.3	24	973(919)
80YZJ-A36	45	46-190	9.6-51.4	700-1480	67.7	2.5	24	980(926)
80YZJ-A39	55	57-189	12.4-60.7	700-1480	64.7	2.4	24	1042(952)
80YZJ-A42	75	61-204	14.4-70.4	700-1480	66.7	2.5	24	1053(963)
80YZJ-A52	160	51-242	22.1-109.8	700-1480	56.3	2.1	21	1465(1378)
100YZJ-A33	45	56-225	8.2-41.6	700-1480	69.6	1.8	32	1003(949)
100YZJ-A36	55	61-245	9.7-49.5	700-1480	71.6	2.0	32	1010(956)
100YZJ-A39	75	61-255	12.6-61.0	700-1480	69.0	2.4	35	1064(1010)
100YZJ-B42	90	83-365	12.7-66.8	700-1480	71.6	2.5	40	1085(1031)
100YZJ-A42	90	66-275	14.7-70.8	700-1480	71.0	2.5	35	1075(1021)
100YZJ-A46	132	79-331	17.3-84.8	700-1480	67.6	2.3	34	1461(1374)
100YZJ-A50	160	85-360	20.5-100.2	700-1480	69.6	2.5	34	1475(1388)
150YZJ-C42	132	142-550	12.1-62.8	700-1480	77.1	2.2	69	1605(1518)
150YZJ-A48	75	111-442	8.7-39.7	490-980	75.8	2.5	48	1728(1641)
150YZJ-A50	75	115-460	9.5-43.1	490-980	76.8	2.5	48	1735(1648)
150YZJ-A55	110	124-504	12.3-53.4	490-980	72.9	2.3	48	2019
150YZJ-A57	110	95-427	13.2-56.3	490-980	67.8	1.8	32	2023
150YZJ-C58	160	134-596	12.8-61.0	490-980	69.1	2.0	75	2063
150YZJ-A58	132	131-532	13.7-59.3	490-980	74.9	2.5	48	2033
150YZJ-A60	160	135-550	14.7-63.5	490-980	75.9	2.5	48	2203
150YZJ-A63	185	146-582	16.3-71.1	490-980	69.8	2.5	48	2211
150YZJ-A65	200	150-600	17.4-75.7	490-980	70.8	2.5	48	2223
150YZJ-A70	185	93-401	20.0-91.2	490-980	62.3	2.0	37	2245
150YZJ-A71	220	142-552	21.8-93.8	490-980	69.8	2.4	48	2263
200YZJ-A58	185	211-841	13.0-57.9	490-980	82.5	2.5	62	2214
200YZJ-A60	185	218-870	13.9-62.0	490-980	83.5	2.5	62	2223
200YZJ-A63	250	228-921	15.4-67.6	490-980	78.6	2.5	62	2311
200YZJ-A65	250	235-950	16.4-72.0	490-980	79.6	2.5	62	2323
200YZJ-A68	315	199-948	18.3-81.5	490-980	74.6	2.8	56	2453

型号 TYPE	允许配带 最大功率 ALLOWABLE MATING MAX. POWER (KW)	清水性能 CLEAR WATER PERFORMANCE					间断通过 最大粒度 PARTICLE MAX. SIZE HANDLED OCCASIONALLY (mm)	泵重 PUMP WEIGHT (kg)
		流量 Q CAPACITY (m³/h)	扬程 H HEAD (m)	转速 n SPEED (r/min)	最高效率 η MAX. EFF (%)	汽蚀余量 (NPSH) r (m)		
200YZJ-A70	315	205-976	19.4-86.4	490-980	75.6	2.8	56	2465
200YZJ-A73	355	219-876	21.6-97.5	490-980	73.1	3.0	56	3065
200YZJ-A75	355	225-900	22.8-102.9	490-980	74.1	3.0	56	3070
200YZJ-A85	560	221-907	32.0-133.7	490-980	70.5	2.8	54	4110
250YZJ-A60	280	276-1153	13.1-60.5	490-980	73.9	2.8	72	2991
250YZJ-A63	315	290-1211	14.4-66.7	490-980	75.9	3.0	72	3008
250YZJ-A65	315	299-1249	15.4-71.0	490-980	76.9	3.0	72	3020
250YZJ-A68	450	272-1342	17.1-80.1	490-980	73.5	2.7	72	3432
250YZJ-A70	450	280-1381	18.1-84.9	490-980	74.5	2.9	72	3446
250YZJ-A73	500	1292-1441	19.7-92.4	490-980	76.5	3.0	72	3466
250YZJ-A75	560	300-1480	20.8-97.5	490-980	77.5	3.0	72	3480
250YZJ-A78	630	345-1380	25.4-108.4	490-980	71.5	3.2	76	4474
250YZJ-A80	710	354-1416	26.7-114.0	490-980	73.5	3.4	76	4490
250YZJ-A83	800	367-1469	28.7-122.7	490-980	75.5	3.5	76	4514
250YZJ-A85	800	376-1504	30.1-128.7	490-980	76.5	3.5	76	4530
250YZJ-A90	450	378-1374	22.3-82.4	400-730	73.8	3.4	69	4980
250YZJ-A96	560	403-1466	25.4-93.7	400-730	77.8	3.5	69	5035
250YZJ-A103	560	402-1573	29.7-110.5	400-730	74.5	2.8	69	5085
300YZJ-A56	250	395-1568	9.7-46.0	490-980	80.9	3.5	96	3030
300YZJ-A65	500	589-2166	13.8-66.2	490-980	77.4	3.7	92	3531
300YZJ-A70	630	635-2333	16.0-76.8	490-980	80.4	3.9	92	3560
300YZJ-A85	450	477-1742	18.9-71.3	400-730	79.8	3.8	85	4965
300YZJ-A90	560	505-1844	21.2-79.9	400-730	82.8	3.9	85	5005
300YZJ-A95	400	441-1735	13.8-58.8	300-590	78.1	3.0	88	5220
300YZJ-A100	450	464-1826	15.3-65.2	300-590	81.1	3.0	88	5265
350YZJ-A80	900	360-3080	10.5-58.5	400-742	75.7	4.2	92.8	5520
350YZJ-A85	900	600-3920	11.2-64.0	400-742	77.2	4.2	100	5805
350YZJ-F100	560	526-2339	14.9-62.8	300-590	77.6	4.4	96	5465
350YZJ-C100	900	620-3660	14.0-60.0	350-590	74.5	4.2	160	5980
350YZJ-C104	900	1000-4000	24.0-78.0	450-650	74.7	4.2	175	6010
400YZJ-F110	900	3400	46.5	490	75	4.2	180	6500

注： 1. (NPSH) r系指本样本泵中第二档转速时规定点之值。
2. 正常通过粒径为允许间断通过的最大粒径的56%。
3. 泵重量栏中，有两数值的为共同底座的泵。其中括号外数据为高转速参数下泵的重量，括号内数据为低转速参数下泵的重量。

NOTE: 1. (NPSH) r refers to the value at the specified point at the second speed in the sammple book.
2. The normal size of particle handled is 56% of the max. Size that can be handled occasionally.
3. There are tow weight datas on common bases. They are the weight datas of the hight speed pumps without brackets, the slow speed pumps in the brackets.

清水性能表 The Water PERFORMANCE CHART

YZJ型渣浆泵直联传动清水性能 (1)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
40YZJ-A17	1400	4.5	10.3	0.4	33.2	2.5	Y80L-4	0.55/380
		8.6	9.9	0.5	49.5		Y90S-4	1.1/380
		11.3	9.1	0.5	52.4		Y90S-4	1.1/380
	2900	9.4	44.6	3.4	33.2	4.5	Y132S1-2	5.5/380
		17.9	42.7	4.2	49.5		Y132S2-2	7.5/380
		23.4	39.3	4.8	52.4		Y132S2-2	7.5/380
40YZJ-A19	1430	8.0	13.6	0.8	39.2	1.3	Y90L-4	1.5/380
		14.6	13.1	0.9	55.4		Y90L-4	1.5/380
		17.0	12.8	1.0	58.8		Y100L1-4	2.2/380
	2930	16.3	57.1	6.5	39.2	4.9	Y160M1-2	11/380
		30.0	54.9	8.1	55.4		Y160M1-2	11/380
		34.9	53.7	8.7	58.8		Y160M1-2	11/380
50YZJ-A33	960	17.0	17.9	2.5	32.8	2.9	Y132M1-6	4/380
		26.0	16.8	2.9	40.6		Y132M2-6	5.5/380
		35.0	14.5	3.3	41.4		Y132M2-6	5.5/380
	1480	26.0	42.5	9.2	32.8	6.0	Y160L-4	15/380
		40.0	40.0	10.7	40.6		Y180M-4	18.5/380
		54.0	34.5	12.3	41.4		Y180M-4	18.5/380
50YZJ-A46	970	31.0	36.9	9.7	32.2	1.4	Y180L-6	15/380
		50.0	35.4	11.6	41.7		Y180L-6	15/380
		62.0	34.3	13.0	44.7		Y200L1-6	18.5/380
	1480	48.0	85.8	34.8	32.2	2.9	Y225M-4	45/380
		77.0	82.3	41.4	41.7		Y250M-4	55/380
		94.0	79.9	45.8	44.7		Y250M-4	55/380
50YZJ-A50	980	38.0	48.5	14.8	33.9	3.0	Y200L2-6	22/380
		60.0	46.3	17.6	42.9		Y225M-6	30/380
		74.0	43.8	19.6	45.1		Y225M-6	30/380
	1480	57.0	110.7	50.7	33.9	3.8	Y280S-4	75/380
		91.0	105.5	60.9	42.9		Y280S-4	75/380
		111.0	99.8	66.9	45.1		Y280M-4	90/380
65YZJ-A27	960	28.0	12.2	1.7	54.2	1.8	Y132S-6	3/380
		37.0	11.9	2.0	60.0		Y132M1-6	4/380
		47.0	11.2	2.3	61.5		Y132M1-6	4/380
	1460	42.0	28.2	6.0	54.2	2.7	Y160M-4	11/380
		56.0	27.5	7.0	60.0		Y160M-4	11/380
		71.0	25.9	8.1	61.5		Y160M-4	11/380
65YZJ-A30	960	31.0	15.0	2.3	56.2	2.0	Y132M1-6	4/380
		41.0	14.7	2.6	62.0		Y132M2-6	5.5/380
		52.0	13.8	3.1	63.5		Y132M2-6	5.5/380
	1460	47.0	34.8	7.9	56.2	3.0	Y160M-4	11/380
		62.0	33.9	9.2	62.0		Y160L-4	15/380
		79.0	32.0	10.8	63.5		Y160L-4	15/380

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (2)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) _r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
80YZJ-A33	980	60.0	18.9	5.5	56.2	2.3	Y160M-6	7.5/380
		85.0	17.6	6.4	64.0		Y160L-6	11/380
		116.0	15.7	7.5	65.7		Y160L-6	11/380
	1480	90.0	43.2	18.8	56.2	3.4	Y200L-4	30/380
		128.0	40.3	21.9	64.0		Y200L-4	30/380
		174.0	35.9	25.9	65.7		Y225S-4	37/380
80YZJ-A36	980	65.0	22.5	6.8	58.2	2.5	Y160L-6	11/380
		93.0	21.0	8.1	66.0		Y160L-6	11/380
		126.0	18.7	9.5	67.7		Y180L-6	15/380
	1480	98.0	51.4	23.6	58.2	3.7	Y200L-4	30/380
		140.0	48.0	27.7	66.0		Y225S-4	37/380
		190.0	42.7	32.6	67.7		Y225M-4	45/380
80YZJ-A39	980	80.0	26.6	10.1	57.6	2.4	Y180L-6	15/380
		105.0	25.4	11.5	63.0		Y200L1-6	18.5/380
		125.0	24.2	12.8	64.7		Y200L1-6	18.5/380
	1480	121.0	60.7	34.7	57.6	4.0	Y225M-4	45/380
		158.0	57.9	39.5	63.0		Y250M-4	55/380
		189.0	55.4	44.1	64.7		Y250M-4	55/380
80YZJ-A42	980	86.0	30.9	12.1	59.6	2.5	Y200L1-6	18.5/380
		113.0	29.5	14.0	65.0		Y200L2-6	22/380
		135.0	28.1	15.5	66.7		Y200L2-6	22/380
	1480	130.0	70.4	41.8	59.6	4.2	Y250M-4	55/380
		170.0	67.2	47.9	65.0		Y280S-4	75/380
		204.0	64.2	53.5	66.7		Y280S-4	75/380
80YZJ-A52	980	71.0	48.1	24.0	38.8	2.1	Y225M-6	30/380
		121.0	46.3	29.3	52.0		Y250M-6	37/380
		160.0	43.4	33.6	56.3		Y280S-6	45/380
	1480	107.0	109.8	82.5	38.8	4.3	Y315S-4	110/380
		182.0	105.5	100.6	52.0		Y315M-4	132/380
		242.0	99.0	115.9	56.3		Y315L1-4	160/380
100YZJ-A33	980	79.0	18.2	6.7	58.7	1.8	Y160L-6	11/380
		134.0	16.6	8.8	69.0		Y180L-6	15/380
		149.0	16.0	9.3	69.6		Y180L-6	15/380
	1480	119.0	41.6	23.0	58.7	3.2	Y200L-4	30/380
		202.0	37.8	30.1	69.0		Y225S-4	37/380
		225.0	36.5	32.1	69.6		Y225M-4	45/380
100YZJ-A36	980	86.0	21.7	8.4	60.7	2.0	Y180L-6	15/380
		146.0	19.7	11.0	71.0		Y180L-6	15/380
		162.0	19.0	11.7	71.6		Y200L1-6	18.5/380
	1480	130.0	49.5	28.9	60.7	3.5	Y225S-4	37/380
		220.0	45.0	38.0	71.0		Y250M-4	55/380
		245.0	43.4	40.4	71.6		Y250M-4	55/380

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (3)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) _r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
100YZJ-A39	980	86.0	26.7	12.1	51.7	2.4	Y200L1-6	18.5/380
		150.0	25.4	15.7	66.0		Y200L2-6	22/380
		169.0	24.7	16.6	68.4		Y225M-6	30/380
	1480	130.0	61.0	41.8	51.7	3.8	Y250M-4	55/380
		228.0	57.8	54.4	66.0		Y280S-4	75/380
		255.0	56.5	57.4	68.4		Y280S-4	75/380
100YZJ-B42	980	117.0	29.3	16.2	57.5	2.5	Y200L2-6	22/380
		205.0	26.5	21.3	69.5		Y225M-6	30/380
		242.0	24.9	22.9	71.6		Y225M-6	30/380
	1480	176.0	66.8	55.7	57.5	5.1	Y280S-4	75/380
		309.0	60.5	73.3	69.5		Y280M-4	90/380
		365.0	56.9	79.0	71.6		Y280M-4	90/380
100YZJ-A42	980	93.0	31.0	14.6	53.7	2.5	Y200L2-6	22/380
		162.0	29.4	19.1	68.0		Y225M-6	30/380
		182.0	28.7	20.2	70.4		Y225M-6	30/380
	1480	140.0	70.8	50.3	53.7	4.0	Y280S-4	75/380
		245.0	67.0	65.7	68.0		Y280M-4	90/380
		275.0	65.5	69.7	70.4		Y280M-4	90/380
100YZJ-A46	980	109.0	37.2	20.0	55.3	2.3	Y225M-6	30/380
		183.0	35.3	26.5	66.5		Y250M-6	37/380
		219.0	34.0	30.6	66.2		Y250M-6	37/380
	1480	166.0	84.8	69.3	55.3	4.2	Y280M-4	90/380
		276.0	80.4	90.9	66.5		Y315S-4	110/380
		331.0	77.5	105.5	66.2		Y315M-4	132/380
100YZJ-A50	980	119.0	43.9	24.8	57.3	2.5	Y225M-6	30/380
		199.0	41.7	33.0	68.5		Y280S-6	45/380
		238.0	40.2	38.2	68.2		Y280M-6	55/380
	1480	180.0	100.2	85.7	57.3	4.5	Y315S-4	110/380
		300.0	95.0	113.3	68.5		Y315M-4	132/380
		360.0	91.6	131.7	68.2		Y315L1-4	160/380
150YZJ-C42	980	199.0	27.5	23.3	64.0	2.2	Y225M-6	30/380
		298.0	25.4	27.9	74.0		Y250M-6	37/380
		364.0	23.8	30.9	76.4		Y280S-6	45/380
	1480	300.0	62.8	80.2	64.0	4.5	Y315S-4	110/380
		450.0	58.0	96.1	74.0		Y315M-4	132/380
		550.0	54.3	106.5	76.4		Y315M-4	132/380
150YZJ-A48	730	164.0	22.0	15.8	62.3	2.5	Y225M-8	22/380
		272.0	20.5	20.5	74.0		Y250M-8	30/380
		329.0	19.4	22.9	75.8		Y250M-8	30/380
	980	221.0	39.7	38.4	62.3	3.0	Y280M-6	55/380
		365.0	36.9	49.6	74.0		Y315S-6	75/380
		442.0	34.8	55.3	75.8		Y315S-6	75/380

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (4)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
150YZJ-A50	730	171.0	23.9	17.6	63.3	2.5	Y250M-8	30/380
		283.0	22.2	22.8	75.0		Y250M-8	30/380
		343.0	21.0	25.5	76.8		Y280S-8	37/380
	980	230.0	43.1	42.6	63.3	3.0	Y280M-6	55/380
		380.0	40.0	55.2	75.0		Y315S-6	75/380
		460.0	37.8	61.7	76.8		Y315S-6	75/380
150YZJ-A55	730	184.0	29.6	26.9	55.2	2.3	Y280S-8	37/380
		321.0	28.2	35.7	69.0		Y280M-8	45/380
		376.0	27.4	39.2	71.6		Y315S-8	55/380
	980	248.0	53.4	65.3	55.2	3.5	Y315M-6	90/380
		431.0	50.8	86.4	69.0		Y315L1-6	110/380
		504.0	49.3	94.5	71.6		Y315L1-6	110/380
150YZJ-A57	730	142.0	31.2	26.2	46.1	1.8	Y280S-8	37/380
		224.0	30.7	32.0	58.5		Y280M-8	45/380
		318.0	29.4	38.2	66.6		Y315S-8	55/380
	980	190.0	56.3	63.2	46.1	2.9	Y315M-6	90/380
		301.0	55.4	77.6	58.5		Y315L1-6	110/380
		427.0	52.9	92.4	66.6		Y315L1-6	110/380
150YZJ-C58	730	200.0	33.8	32.5	56.6	2.0	Y280M-8	45/380
		341.0	31.1	43.6	66.2		Y315S-8	55/380
		444.0	28.4	49.7	69.1		Y315M-8	75/380
	980	268.0	61.0	78.7	56.6	3.2	Y315L1-6	110/380
		458.0	56.0	105.5	66.2		Y355L2-6	132/380
		596.0	51.2	120.3	69.1		Y355M1-6	160/380
150YZJ-A58	730	194.0	32.9	30.4	57.2	2.5	Y280S-8	37/380
		338.0	31.4	40.7	71.0		Y315S-8	55/380
		396.0	30.5	44.7	73.6		Y315S-8	55/380
	980	261.0	59.3	73.7	57.2	3.8	Y315M-6	90/380
		454.0	56.5	98.4	71.0		Y315L2-6	132/380
		532.0	54.9	108.1	73.6		Y315L2-6	132/380
150YZJ-A60	730	201.0	35.2	33.1	58.2	2.5	Y280M-8	45/380
		350.0	33.6	44.5	72.0		Y315S-8	55/380
		410.0	32.6	48.8	74.6		Y315M-8	75/380
	980	270.0	63.5	80.2	58.2	3.8	Y315L1-6	110/380
		470.0	60.5	107.6	72.0		Y315L2-6	132/380
		550.0	58.7	117.9	74.6		Y355M1-6	160/380
150YZJ-A63	730	216.0	39.5	42.9	54.2	2.5	Y315S-8	55/380
		361.0	38.0	54.9	68.0		Y315M-8	75/380
		433.0	36.2	61.7	69.2		Y315M-8	75/380
	980	291.0	71.1	104.0	54.2	4.0	Y315L2-6	132/380
		485.0	68.6	133.2	68.0		Y355M1-6	160/380
		582.0	65.2	149.3	69.2		Y355M2-6	185/380

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (5)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
150YZJ-A65	730	223.0	42.0	46.2	55.2	2.5	Y315M-8	75/380
		372.0	40.5	59.5	69.0		Y315M-8	75/380
		447.0	38.5	66.8	70.2		Y315L1-8	90/380
	980	300.0	75.7	112.0	55.2	4.0	Y315L2-6	132/380
		500.0	73.0	144.1	69.0		Y355M2-6	185/380
		600.0	69.4	161.5	70.2		Y355M3-6	200/380
150YZJ-A70	730	139.0	50.6	39.6	48.4	2.0	Y315S-8	55/380
		212.0	48.3	47.7	58.4		Y315M-8	75/380
		299.0	44.3	57.9	62.3		Y315M-8	75/380
	980	186.0	91.2	95.4	48.4	3.0	Y315L2-6	132/380
		285.0	87.1	115.8	58.4		Y355M1-6	160/380
		401.0	79.8	139.9	62.3		Y355M2-6	185/380
150YZJ-A71	730	212.0	52.0	55.4	54.2	2.4	Y315M1-8	75/380
		362.0	49.6	72.1	67.8		Y315M2-8	90/380
		411.0	48.3	77.8	69.5		Y315M2-8	90/380
	980	284.0	93.8	133.9	54.2	4.0	Y355M1-6	160/380
		486.0	89.3	174.3	67.8		Y355L1-6	220/380
		552.0	87.1	188.4	69.5		Y355L1-6	220/380
200YZJ-A58	730	313.0	32.1	43.2	63.4	2.5	Y315S-8	55/380
		533.0	30.1	55.3	79.0		Y315M-8	75/380
		626.0	28.8	60.1	81.7		Y315M-8	75/380
	980	421.0	57.9	104.7	63.4	4.0	Y315L2-6	132/380
		715.0	54.2	133.6	79.0		Y355M1-6	160/380
		841.0	51.9	145.5	81.7		Y355M2-6	185/380
200YZJ-A60	730	324.0	34.4	47.1	64.4	2.5	Y315M-8	75/380
		551.0	32.2	60.4	80.0		Y315L1-8	90/380
		648.0	30.8	65.7	82.7		Y315L1-8	90/380
	980	435.0	62.0	114.0	64.4	4.0	Y315L2-6	132/380
		740.0	58.0	146.1	80.0		Y355M2-6	185/380
		870.0	55.5	159.0	82.7		Y355M2-6	185/380
200YZJ-A63	730	339.0	37.5	55.7	62.2	2.5	Y315M-8	75/380
		592.0	35.5	75.3	76.0		Y315L2-8	110/380
		686.0	34.2	81.3	78.6		Y315L2-8	110/380
	980	456.0	67.6	135.0	62.2	4.3	Y355M1-6	160/380
		795.0	64.0	182.3	76.0		Y355-6	220/6000
		921.0	61.6	196.6	78.6		Y355-6	250/6000
200YZJ-A65	730	350.0	40.0	60.3	63.2	2.5	Y315M-8	75/380
		611.0	37.8	81.7	77.0		Y315L2-8	110/380
		708.0	36.4	88.2	79.6		Y315L2-8	110/380
	980	470.0	72.0	145.8	63.2	4.3	Y355M2-6	185/380
		820.0	68.1	197.5	77.0		Y355-6	250/6000
		950.0	65.6	213.2	79.6		Y355-6	250/6000

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (6)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
200YZJ-A68	730	296.0	45.2	66.5	54.8	2.8	Y315L1-8	90/380
		534.0	43.1	88.7	70.7		Y315L2-8	110/380
		706.0	40.7	104.9	74.6		Y355M1-8	132/380
	980	397.0	81.5	160.8	54.8	3.8	Y355M3-6	200/380
		717.0	77.7	214.6	70.7		Y355-6	250/6000
		948.0	73.2	253.3	74.6		Y400-6	315/6000
200YZJ-A70	730	305.0	47.9	71.3	55.8	2.8	Y315L1-8	90/380
		550.0	45.7	95.5	71.7		Y355M1-8	132/380
		727.0	43.1	112.9	75.6		Y355M1-8	132/380
	980	409.0	86.4	172.5	55.8	3.8	Y355M3-6	200/380
		738.0	82.3	230.7	71.7		Y400-6	280/6000
		976.0	77.6	272.8	75.6		Y400-6	315/6000
200YZJ-A73	730	326.0	54.1	79.5	60.4	3.0	Y315L2-8	110/380
		544.0	50.3	105.0	71.0		Y355M1-8	132/380
		652.0	47.8	118.2	71.8		Y355M2-8	160/380
	980	438.0	97.5	192.5	60.4	4.5	Y355-6	250/6000
		730.0	90.7	254.0	71.0		Y400-6	315/6000
		876.0	86.2	286.4	71.8		Y400-6	355/6000
200YZJ-A75	730	335.0	57.1	84.8	61.4	3.0	Y315L2-8	110/380
		559.0	53.1	112.3	72.0		Y355M1-8	132/380
		670.0	50.5	126.6	72.8		Y355M2-8	160/380
	980	450.0	102.9	205.4	61.4	4.5	Y355-6	250/6000
		750.0	95.7	271.5	72.0		Y400-6	355/6000
		900.0	91.0	306.4	72.8		Y400-6	355/6000
200YZJ-A85	730	329	74.2	133.0	50.0	2.8	Y355M2-8	160/380
		639	71.1	180.9	68.4		Y400-8	220/6000
		676	71.0	185.4	70.5		Y400-8	220/6000
	980	441	133.7	321.1	50.0	5.0	Y400-6	400/6000
		858	128.2	437.9	68.4		Y450-6	560/6000
		907	127.9	448.1	70.5		Y450-6	560/6000
250YZJ-A60	730	411	33.6	60.7	61.8	2.8	Y315M-8	75/380
		667	31.3	79.0	72.0		Y315L2-8	110/380
		858	29.1	92.0	73.9		Y315L2-8	110/380
	980	551	60.5	146.9	61.8	4.2	Y355M2-6	185/380
		985	56.4	190.9	72.0		Y355L2-6	250/380
		1153	52.3	222.2	73.9		Y400-6	280/6000
250YZJ-A63	730	431	37.0	68.1	63.8	3.0	Y315L1-8	90/380
		701	34.5	89.0	74.0		Y315L2-8	110/380
		901	32.0	103.4	75.9		Y355M1-8	132/380
	980	579	66.7	164.8	63.8	4.5	Y355-6	200/6000
		940	62.2	215.2	74.0		Y355-6	250/6000
		1211	57.7	250.7	75.9		Y400-6	315/6000

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (7)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
250YZJ-A65	730	445	39.4	73.7	64.8	3.0	Y315L1-8	90/380
		723	36.7	96.3	75.0		Y355M1-8	132/380
		930	34.1	112.3	76.9		Y355M1-8	132/380
	980	597	71.0	178.1	64.8	4.5	Y355-6	220/6000
		970	66.2	233.2	75.0		Y400-6	280/6000
		1249	61.4	271.6	76.9		Y400-6	315/6000
250YZJ-A68	730	405	44.5	84.2	58.3	2.7	Y315L2-8	110/380
		743	41.9	117.8	72.0		Y355M2-8	160/380
		999	38.0	144.4	71.6		Y355L1-8	185/380
	980	544	80.1	203.5	58.3	3.7	Y355-6	250/6000
		997	75.6	285.1	72.0		Y400-6	355/6000
		1342	68.4	349.1	71.6		Y450-6	450/6000
250YZJ-A70	730	417	47.1	90.2	59.3	2.9	Y315L2-8	110/380
		764	44.4	126.5	73.0		Y355M2-8	160/380
		1029	40.2	155.2	72.6		Y355L1-8	185/380
	980	560	84.9	218.3	59.3	3.9	Y400-6	280/6000
		1027	80.1	306.9	73.0		Y400-6	400/6000
		1381	72.5	375.6	72.6		Y450-6	450/6000
250YZJ-A73	730	435	51.3	99.1	61.3	3.0	Y355M1-8	132/380
		797	48.3	139.8	75.0		Y355L1-8	185/380
		1073	43.8	171.6	74.9		Y355L2-8	220/380
	980	584	92.4	239.7	61.3	4.1	Y400-6	280/6000
		1071	87.2	339.1	75.0		Y400-6	400/6000
		1441	78.8	414.5	74.6		Y450-6	500/6000
250YZJ-A75	730	447	54.1	105.7	62.3	3.0	Y355M1-8	132/380
		819	51.0	149.7	76.0		Y355L1-8	185/380
		1102	46.2	183.4	75.6		Y400-8	220/6000
	980	600	97.5	255.7	62.3	4.1	Y400-6	315/6000
		1100	92.0	362.6	76.0		Y450-6	450/6000
		1480	83.2	443.6	75.6		Y450-6	560/6000
250YZJ-A78	730	618	56.9	155.0	61.8	3.2	Y355L1-8	185/380
		1065	51.1	207.0	71.6		Y400-8	250/6000
		1338	46.7	231.2	73.6		Y400-8	280/6000
	980	830	102.5	374.9	61.8	6.3	Y450-6	450/6000
		1430	92.1	500.9	71.6		Y450-6	560/6000
		1796	84.2	559.5	73.6		Y450-6	630/6000
250YZJ-C80	594	891	38.3	133.2	69.7	3.3	Y335L2-10	160/380
		1492	33.5	181.1	75.1		Y450-10	220/6000
		1790	29.2	195.9	72.6		Y450-10	220/6000

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能（8）

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m³/h	m	kW	%	m	型 号	功率/电压 kW/V
250YZJ-A80	730	527	63.2	161.7	56.1	3.4	Y400-8	200/6000
		875	61.1	211.0	69.0		Y400-8	280/6000
		1054	59.2	234.1	72.6		Y400-8	280/6000
	980	708	114.0	391.8	56.1	5.4	Y450-6	500/6000
		1175	110.2	511.1	69.0		Y450-6	630/6000
		1416	106.7	566.7	72.6		Y500-6	710/6000
250YZJ-A83	730	547	68.1	174.6	58.1	3.5	Y400-8	220/6000
		908	65.8	229.2	71.0		Y400-8	280/6000
		1094	63.7	254.4	74.6		Y450-8	315/6000
	980	734	122.7	422.1	58.1	5.5	Y450-6	500/6000
		1219	118.6	554.5	71.0		Y500-6	710/6000
		1469	114.8	615.6	74.6		Y500-6	800/6000
250YZJ-A85	730	590	71.4	184.2	59.1	3.5	Y400-8	220/6000
		930	69.0	242.7	72.0		Y450-8	315/6000
		1120	66.8	269.5	75.6		Y450-8	315/6000
	980	752	128.7	446.0	59.1	5.5	Y450-6	560/6000
		1248	124.4	587.2	72.0		Y500-6	710/6000
		1504	120.4	652.3	75.6		Y500-6	800/6000
250YZJ-A90	590	558	53.8	134.9	60.6	3.4	Y355L2-10	160/380
		816	51.7	164.1	70.0		Y450-10	200/6000
		1111	48.5	198.8	73.8		Y450-10	250/6000
	730	690	82.4	255.5	60.6	5.3	Y450-8	315/6000
		1009	79.1	310.5	70.0		Y450-8	400/6000
		1374	74.3	376.7	73.8		Y450-8	450/6000
250YZJ-A96	590	595	61.2	153.5	64.6	3.5	Y450-10	185/6000
		870	58.8	188.3	74.0		Y450-10	250/6000
		1185	55.2	299.0	77.8		Y450-10	280/6000
	730	736	93.7	290.7	64.6	5.5	Y450-8	355/6000
		1076	90.0	356.4	74.0		Y450-8	450/6000
		1466	84.5	433.6	77.8		Y500-8	500/6000
250YZJ-A103	590	593	72.2	193.4	60.3	2.8	Y450-10	250/6000
		862	69.7	235.1	69.6		Y450-10	280/6000
		1271	64.6	300.1	71.5		Y450-10	355/6000
	730	734	110.5	366.3	60.3	4.3	Y450-8	450/6000
		1067	106.7	445.5	69.6		Y500-8	560/6000
		1573	98.9	568.7	74.5		Y500-8	710/6000
300YZJ-A56	730	588	25.5	61.4	66.5	3.5	Y315M-8	75/380
		1054	22.6	80.7	80.4		Y315L2-8	110/380
		1168	21.5	84.5	80.9		Y315L2-8	110/380
	980	789	46.0	148.6	66.5	5.5	Y355M2-6	185/380
		1415	40.8	195.6	80.4		Y355L2-6	250/380
		1568	38.8	204.8	80.9		Y355L2-6	250/380

注：表中效率为采用填料轴封之值

YZJ型渣浆泵直联传动清水性能 (9)

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
300YZJ-A65	730	877	36.7	127.0	69.0	3.7	Y355M2-8	160/380
		1465	31.9	165.3	77.0		Y355L2-8	200/380
		1614	30.6	173.8	77.4		Y400-8	220/6000
	980	1178	66.2	307.8	69.0	6.6	Y450-6	400/6000
		1967	57.5	400.0	77.0		Y450-6	500/6000
		2166	55.2	420.7	77.4		Y450-6	500/6000
300YZJ-A70	730	945	42.6	152.3	72.0	3.9	Y355L1-8	185/380
		1578	37.0	198.8	80.0		Y400-8	250/6000
		1738	35.5	209.0	80.4		Y400-8	250/6000
	980	1269	76.8	368.6	72.0	7.0	Y450-6	450/6000
		2118	66.7	480.9	80.0		Y450-6	630/6000
		2333	64.0	505.8	80.4		Y450-6	630/6000
300YZJ-A85	590	704	46.6	135.2	66.1	3.8	Y355L2-10	160/380
		1258	42.9	189.6	77.5		Y450-10	220/6000
		1408	41.2	201.5	78.4		Y450-10	250/6000
	730	871	71.3	255.9	66.1	5.6	Y450-8	315/6000
		1556	65.6	358.7	77.5		Y450-8	450/6000
		1742	63.1	381.7	78.4		Y450-8	450/6000
300YZJ-C90	493	992	35.4	137.1	69.7	2.5	Y450-8	315/6000
		1657	31.7	182.1	78.6		Y450-8	450/6000
		1996	29.4	201.9	79.1		Y450-8	450/6000
	591	1189	50.9	236.4	69.7	3.6	Y450-10	280/6000
		1987	45.6	313.8	78.6		Y450-10	355/6000
		2393	42.2	347.5	79.7		Y450-10	400/6000
300YZJ-A90	590	745	52.2	153.3	69.1	3.9	Y450-10	185/6000
		1332	48.1	216.7	80.5		Y450-10	280/6000
		1490	46.2	230.3	81.4		Y450-10	280/6000
	730	922	79.9	290.3	69.1	5.7	Y450-8	355/6000
		1648	73.6	410.3	80.5		Y500-8	500/6000
		1844	70.7	436.2	81.4		Y500-8	560/6000
300YZJ-A95	490	720	40.6	125.0	63.7	3.0	Y450-12	185/6000
		1408	37.2	184.3	77.4		Y450-12	220/6000
		1441	36.9	186.4	77.7		Y450-12	220/6000
	590	867	58.8	217.9	63.7	4.1	Y450-10	280/6000
		1696	53.9	321.6	77.4		Y500-10	400/6000
		1735	53.5	325.3	77.7		Y500-10	400/6000
300YZJ-A100	490	758	45.0	139.3	66.7	3.0	Y450-12	185/6000
		1482	41.2	206.8	80.4		Y450-12	250/6000
		1517	40.9	209.4	80.7		Y450-12	250/6000
	590	913	62.5	243.0	66.7	4.1	Y450-10	315/6000
		1785	59.7	361.0	80.4		Y500-10	450/6000
		1826	59.3	365.4	80.7		Y500-10	450/6000

注：表中效率为采用填料轴封之值


YZJ型渣浆泵直联传动清水性能（10）

型 号	转速 n	流量 Q	扬程 H	轴功率 Pa	效率 η	必需汽蚀 余量 (NPSH) _r	配套电机	
	r/min	m ³ /h	m	kW	%	m	型 号	功率/电压 kW/V
350YZJ-A80	591	1236	35.7	172.0	69.8	6.6	Y450-10	220/6000
		1773	32.0	204.0	75.7		Y450-10	250/6000
		2847	18.2	256.5	55.0		Y450-10	280/6000
	742	1552	56.2	340.1	69.8	10.5	Y450-8	400/6000
		2227	50.4	403.5	75.7		Y450-8	450/6000
		3575	28.8	509.5	55.0		Y450-8	560/6000
350YZJ-A85	591	1514	39.4	246.3	65.9	6.6	Y450-10	280/6000
		2106	35.6	264.3	77.2		Y450-10	315/6000
		2980	26.9	308.2	70.8		Y450-10	355/6000
	742	1901	62.1	487.5	65.9	10.5	Y500-8	560/6000
		2644	56.1	523.0	77.2		Y500-8	630/6000
		3741	42.4	609.9	70.8		Y500-8	710/6000
350YZJ-C100	493	1370	41.7	233.2	66.7	5.1	Y500-12	280/6000
		2416	34.0	306.3	73.0		Y500-12	355/6000
		2911	30.0	337.8	70.3		Y500-12	400/6000
	592	1643	60.0	402.3	66.7	7.4	Y500-10	450/6000
		2900	49.1	531.1	73.0		Y500-10	630/6000
		3502	43.4	588.5	70.3		Y560-10	710/6000
350YZJ-F100	490	860	43.3	167.9	60.4	4.4	Y450-12	220/6000
		1651	41.0	239.4	77.0		Y500-12	315/6000
		1943	37.9	260.8	79.6		Y500-12	315/6000
	590	1035	62.8	293.1	60.4	5.8	Y450-10	355/6000
		1988	59.4	417.6	77.0		Y500-10	500/6000
		2339	55.0	455.6	76.9		Y500-10	560/6000

注：表中效率为采用填料轴封之值



结构图 CONSTRUCTIONAL DRAWING

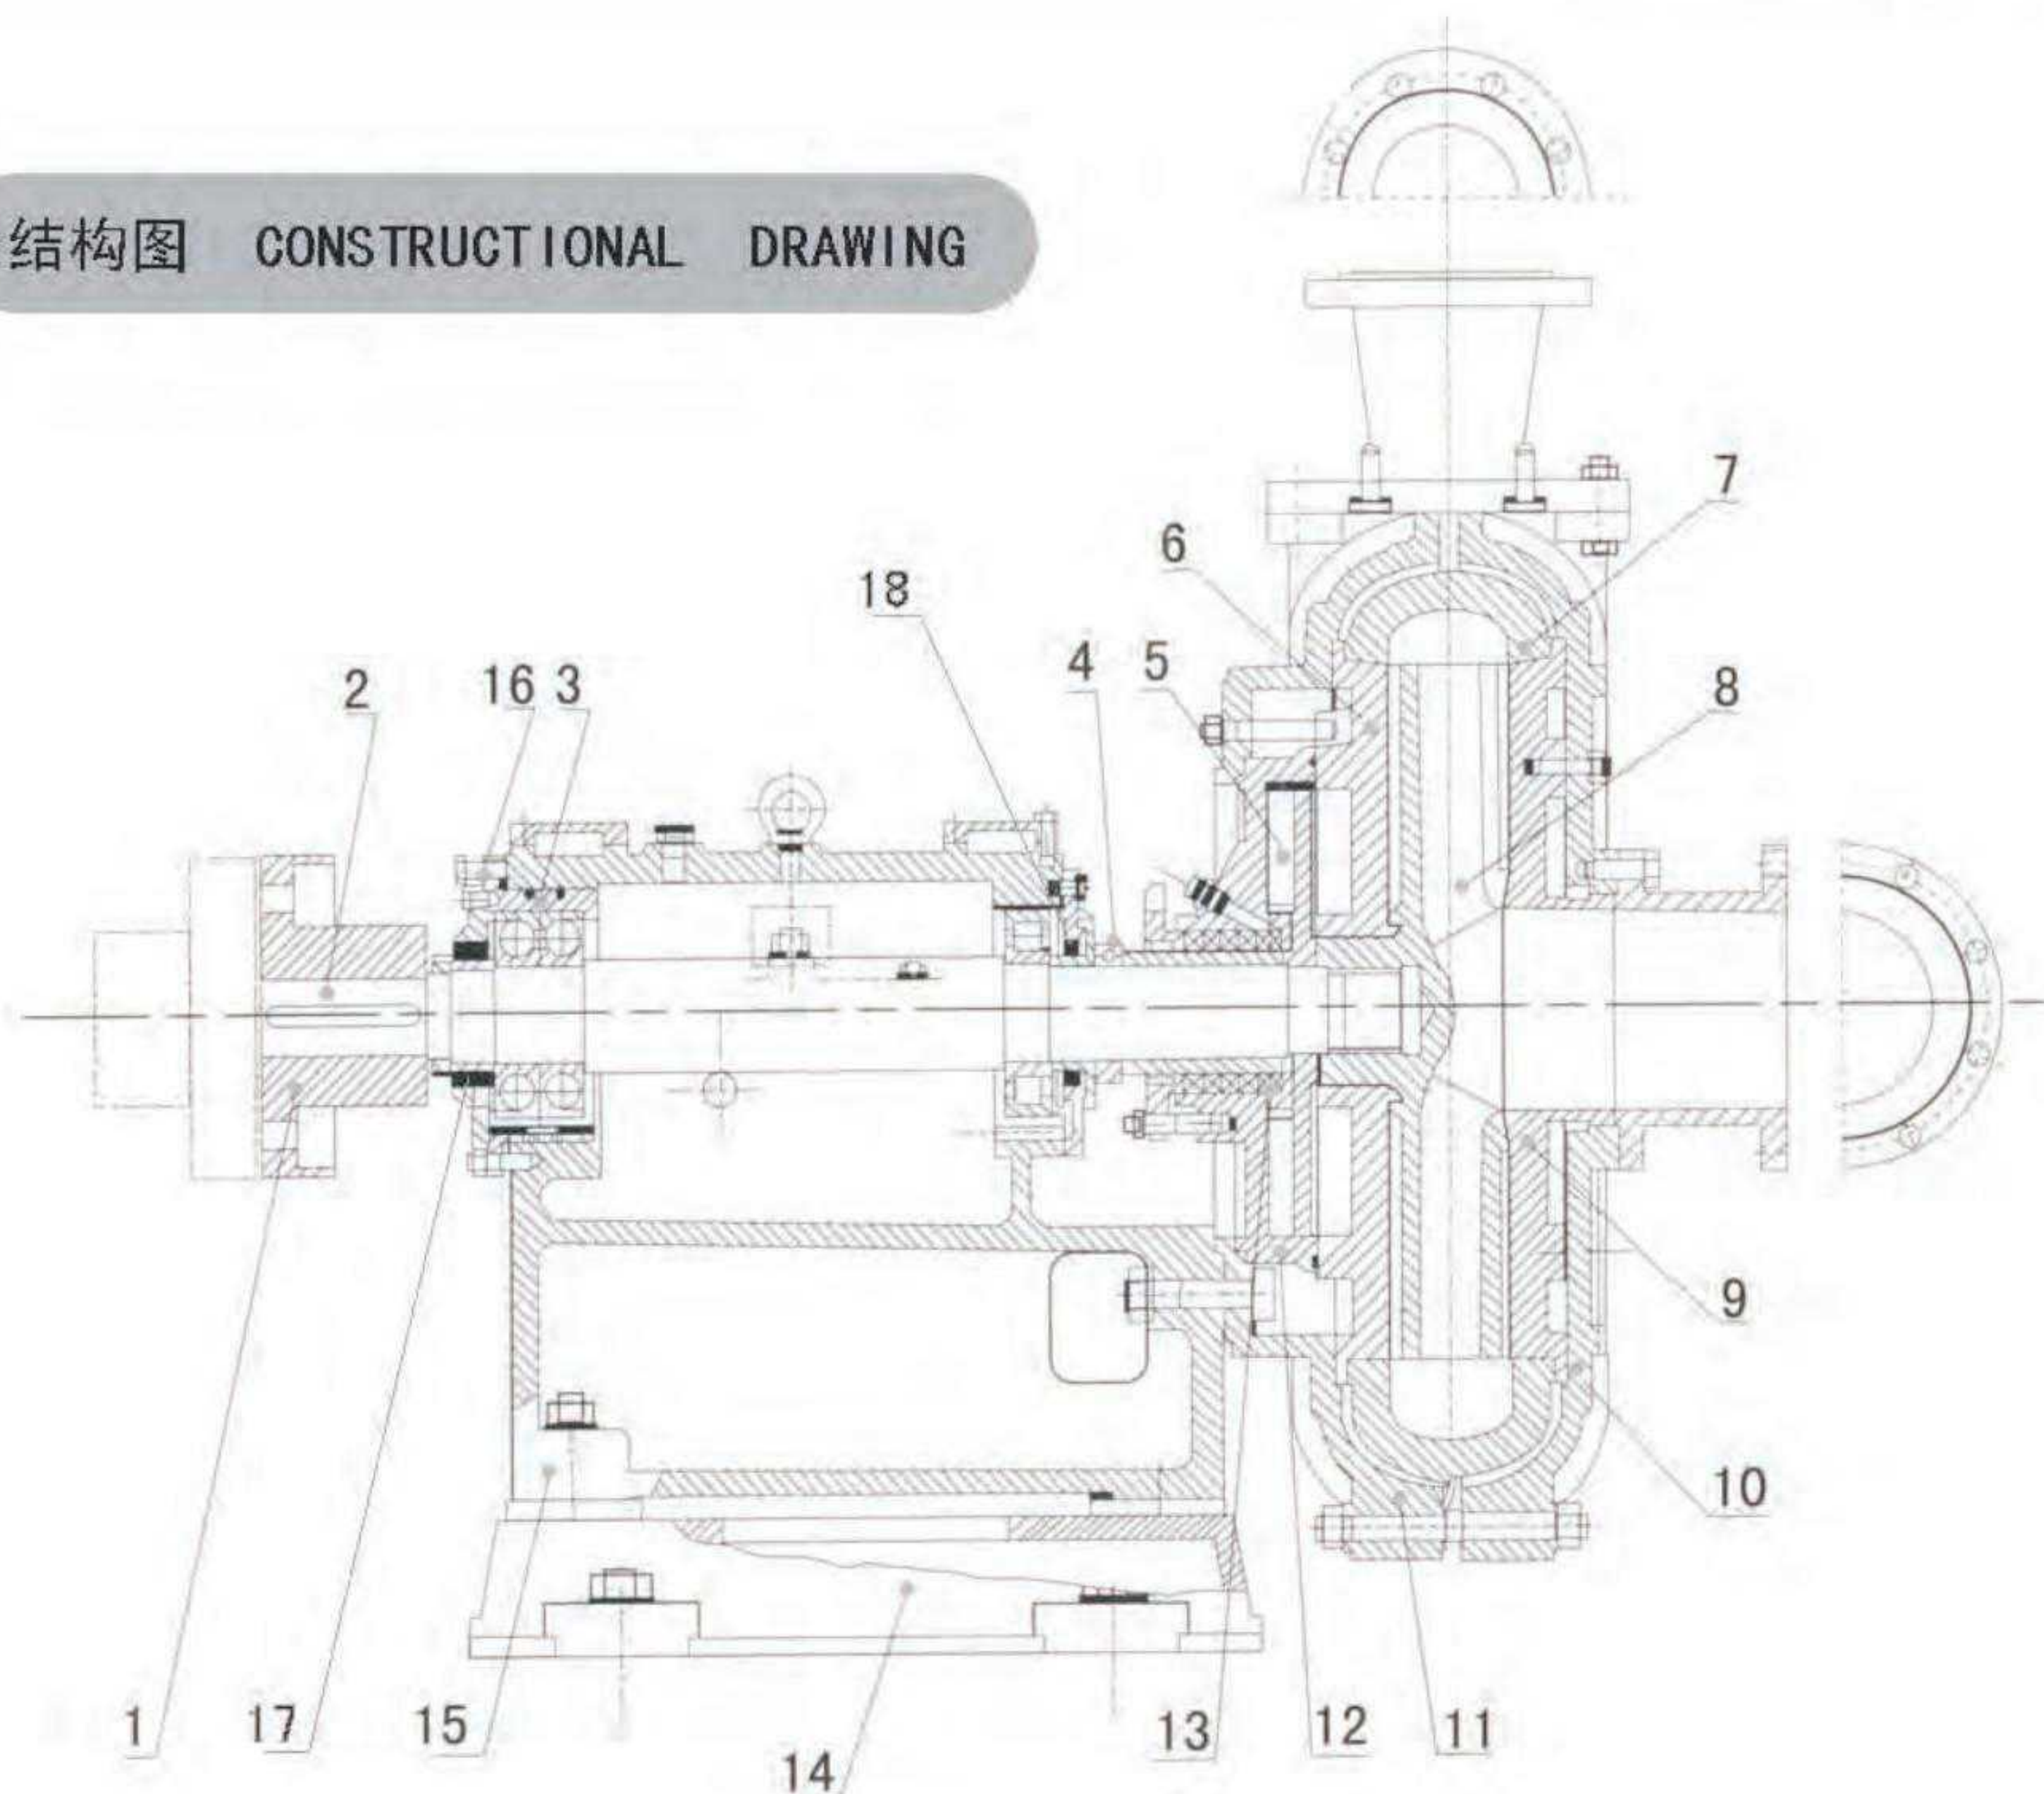

1. 联轴器 COUPLING

7. 蜗壳 VOLUTE CASING

13. 水封环 WATER-SEAL

2. 轴 SHAFT

8. 叶轮 IMPELLER

14. 底座 BASE

3. 轴承箱 BEARING HOUSING

9. 前护板 FRONT LINER PLATE

15. 托架 SUPPORT

4. 拆卸环 DISASSEMBLY RING

10. 前泵壳 FRONT CASING

16. 调节螺钉 ADJUSTING BOLTS

5. 副叶轮 EXPELLER

11. 后泵壳 REAR CASING


17. 后端金属密封组件
THE METALLIC SEAL ASSEMBLY

6. 后护板 REAR LINER PLATE

12. 填料箱 STUFFING BOX

18. 前端金属密封组件
FORMER METAL SEAL ASSEMBLY

直联传动安装尺寸 (单独底座)
INSTALLATION SIZES OF DIRECTLY-COUPLED (SINGLE BASE)

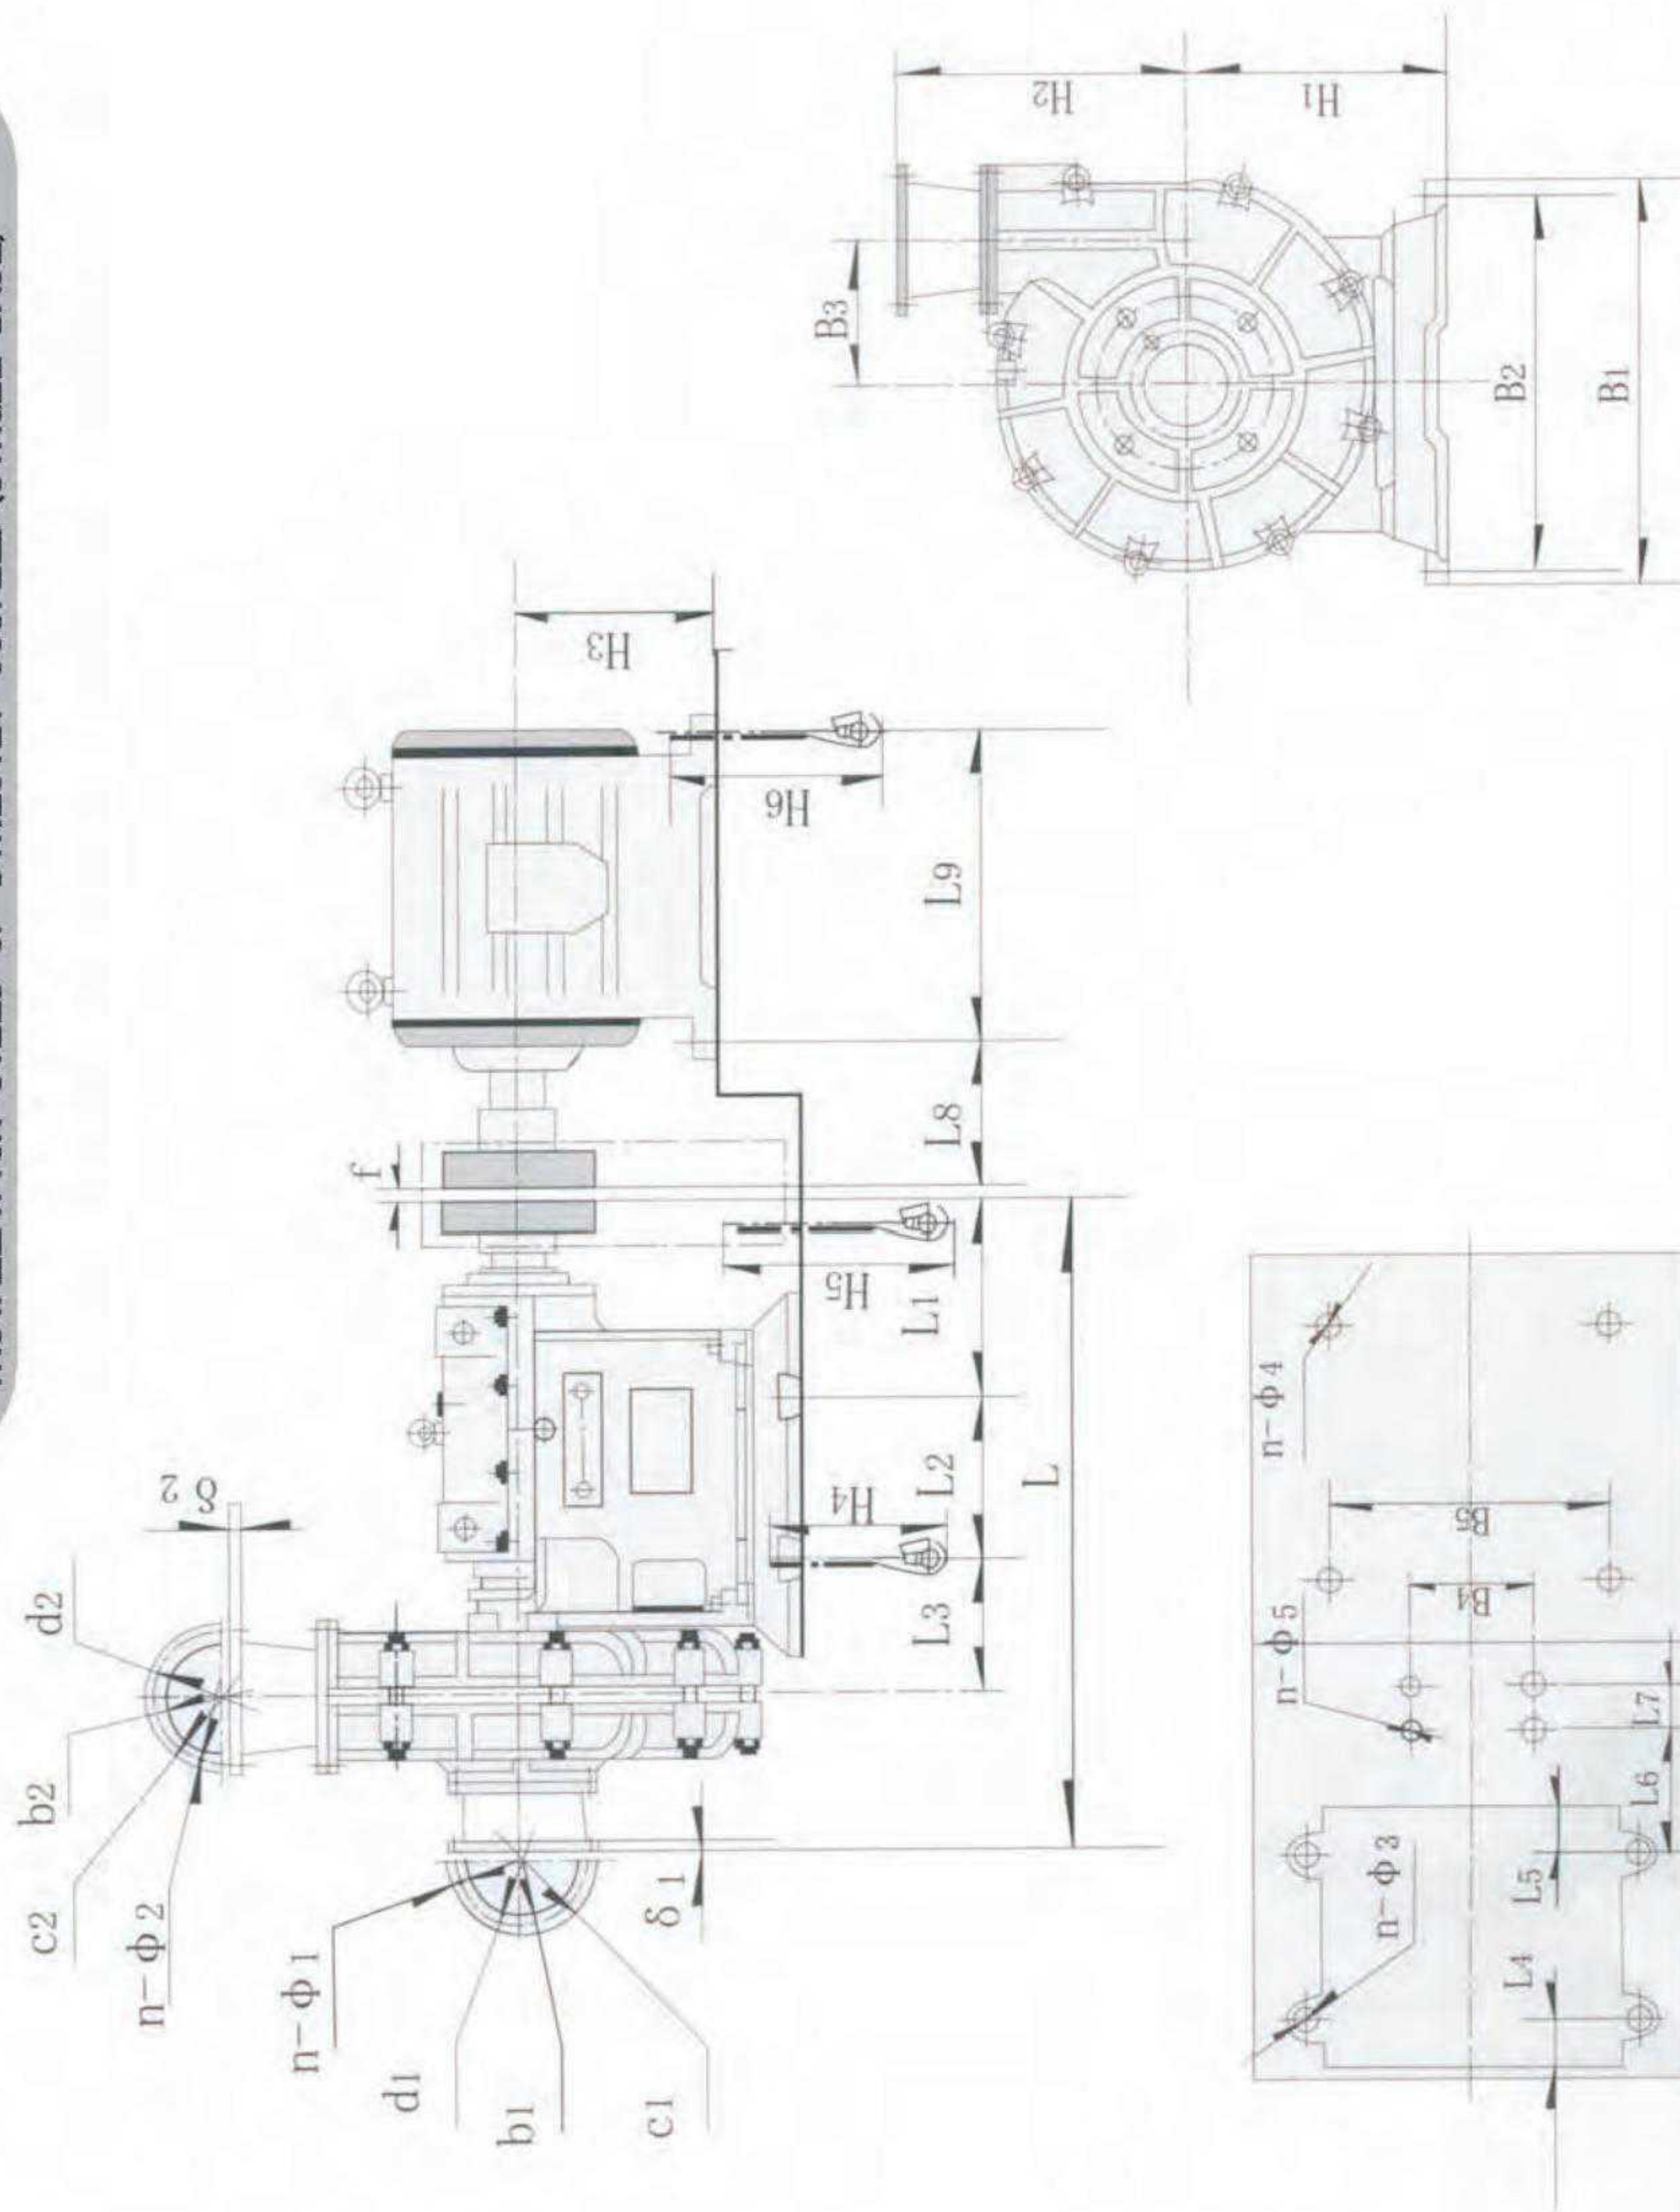

直联传动安装尺寸1 (单独底座) INSTALLATION SIZES OF DIRECTLY-COUPLED1 (SINGLE BASE)

项目 ITEM		电动机 MOTORS		L8	L9	B5	H3	H6	n-φ4	$\frac{L}{L1}$	$\frac{L2}{L3}$	$\frac{L4}{L5}$	$\frac{L6}{L7}$	$\frac{B1}{B2}$	$\frac{B3}{B4}$	$\frac{H1}{H2}$	$\frac{H4}{H5}$	$\frac{f}{n-\phi 3}$	$\frac{n-\phi 1}{d1}$	$\frac{b1}{c1}$	$\frac{\delta 1}{\delta 2}$	$\frac{n-\phi 2}{d2}$	$\frac{b2}{c2}$	n-φ5
型号 TYPE	型号 TYPE	功率(KW) POWER																						
150YZJ-A57	Y315S-8	55	386	406	508	315	630	4-φ28																
	Y280M-8	45	330	419	457	280	500	4-φ24	$\frac{1571}{355}$	$\frac{510}{360}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{370}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 25}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y280S-8	37	330	368	457	280	500	4-φ24																
	Y315L1-6	110	386	508	508	315	630	4-φ28																
	Y315M-6	90	386	457	508	315	630	4-φ28																
150YZJ-C58	Y315M-8	75	386	457	508	315	630	4-φ28																
	Y315S-8	55	386	406	508	315	630	4-φ28	$\frac{1567}{355}$	$\frac{510}{358}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{385}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 25}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y280M-8	45	330	419	457	280	500	4-φ24																
	Y355M1-6	160	424	610	560	355	630	4-φ28																
	Y315L2-6	132	386	508	508	315	630	4-φ28																
Y315L1-6	110	386	508	508	315	630	4-φ28																	
150YZJ-A55	Y315S-8	55	386	406	508	315	630	4-φ28																
	Y280M-8	45	330	419	457	280	500	4-φ24	$\frac{1571}{355}$	$\frac{510}{360}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{370}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 25}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y280S-8	37	330	368	457	280	500	4-φ24																
	Y315L1-6	110	386	508	508	315	630	4-φ28																
	Y315M-6	90	386	457	508	315	630	4-φ28																
150YZJ-A58	Y315S-8	55	386	406	508	315	630	4-φ28																
	Y280S-8	37	330	368	457	280	500	4-φ24	$\frac{1571}{355}$	$\frac{510}{360}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{370}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 25}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y315L2-6	132	386	508	508	315	630	4-φ28																
	Y315M-6	90	386	457	508	315	630	4-φ28																
150YZJ-A60	Y315M-8	75	386	457	508	315	630	4-φ28																
	Y315S-8	55	386	406	508	315	630	4-φ28	$\frac{1571}{355}$	$\frac{510}{360}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{370}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 25}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y280M-8	45	330	419	457	280	500	4-φ24																
	Y355M1-6	160	424	560	610	355	630	4-φ28																
	Y315L2-6	132	386	508	508	315	630	4-φ28																
Y315L1-6	110	386	508	508	315	630	4-φ28																	
150YZJ-A63	Y315M-8	75	386	457	508	315	630	4-φ28																
	Y315S-8	55	386	406	508	315	630	4-φ28	$\frac{1570}{368}$	$\frac{510}{343}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1000}{900}$	$\frac{380}{420}$	$\frac{660}{678}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 26}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y355M2-6	185	424	560	610	355	630	4-φ28																
	Y355M1-6	160	424	560	610	355	630	4-φ28																
	Y315L2-6	132	386	508	508	315	630	4-φ28																
150YZJ-A65	Y315L1-8	90	386	508	508	315	630	4-φ28																
	Y315M-8	75	386	457	508	315	630	4-φ28	$\frac{1570}{368}$	$\frac{510}{343}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1000}{900}$	$\frac{380}{420}$	$\frac{660}{678}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 26}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14	
	Y355M3-6	200	424	560	610	355	630	4-φ28																
	Y355M2-6	185	424	560	610	355	630	4-φ28																
	Y315L2-6	132	386	508	508	315	630	4-φ28																

注：配用其它型号电机，应将电机部分安装尺寸作相应更动。

NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOTOR USED SHOULD BE ACCORDINGLY MODIFIED.

项目ITEM 型号TYPE	电动机MOTORS		L8	L9	B5	H3	H6	n-φ4	$\frac{L}{L_1}$	$\frac{L_2}{L_3}$	$\frac{L_4}{L_5}$	$\frac{L_6}{L_7}$	$\frac{B_1}{B_2}$	$\frac{B_3}{B_4}$	$\frac{H_1}{H_2}$	$\frac{H_4}{H_5}$	$\frac{f}{n-\phi 3}$	$\frac{n-\phi 1}{d_1}$	$\frac{b_1}{e_1}$	$\frac{\delta_1}{\delta_2}$	$\frac{n-\phi 2}{d_2}$	$\frac{b_2}{e_2}$	n-φ5
	型号TYPE	功率(KW)POWER																					
	Y315M-8	75	386	457	508	315	630	4-φ28	$\frac{1602}{368}$	$\frac{510}{331}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1000}{900}$	$\frac{410}{420}$	$\frac{660}{748}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{8-\phi 23}{\phi 295}$	$\frac{\phi 200}{\phi 335}$	$\frac{26}{32}$	$\frac{8-\phi 26}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14
150YZJ-A70	Y315S-8	55	386	406	508	315																	
	Y355M2-6	185	424	560	610	355																	
	Y355M1-6	160	424	560	610	355																	
	Y315L2-6	132	386	508	508	315																	
	Y315M2-8	90	386	457	508	315	630	4-φ28	$\frac{1585}{368}$	$\frac{510}{354}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1000}{900}$	$\frac{416}{420}$	$\frac{660}{760}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{8-\phi 26}{\phi 250}$	$\frac{\phi 150}{\phi 300}$	4-φ14
150YZJ-A71	Y315M1-8	75	386	457	508	315																	
	Y355L1-6	220	424	630	610	355																	
	Y355M1-6	160	424	560	610	355																	
	Y315M-8	75	386	457	508	315	630	4-φ28	$\frac{1593}{355}$	$\frac{510}{371}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{380}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{12-\phi 25}{\phi 310}$	$\frac{\phi 200}{\phi 360}$	4-φ14
200YZJ-A58	Y315S-8	55	386	406	508	315																	
	Y355M2-6	185	424	560	610	355																	
	Y355M1-6	160	424	560	610	355																	
	Y355L2-6	132	386	508	508	315																	
	Y315M2-8	90	386	457	508	315	630	4-φ28	$\frac{1600}{355}$	$\frac{510}{367}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{400}{420}$	$\frac{660}{678}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{12-\phi 25}{\phi 310}$	$\frac{\phi 200}{\phi 360}$	4-φ14
200YZJJ-A60	Y315M1-8	75	386	457	508	315																	
	Y355M3-6	200	424	560	610	355																	
	Y355M2-6	185	424	560	610	355																	
	Y355M1-6	160	424	560	610	355																	
	Y315L1-8	90	386	508	508	315	630	4-φ28	$\frac{1593}{355}$	$\frac{510}{371}$	$\frac{157}{157}$	$\frac{258}{200}$	$\frac{1000}{900}$	$\frac{380}{420}$	$\frac{660}{658}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{12-\phi 25}{\phi 310}$	$\frac{\phi 200}{\phi 360}$	4-φ14
200YZJ-A60	Y315M-8	75	386	457	508	315																	
	Y355M2-6	185	424	560	610	355																	
	Y315L2-6	132	386	508	508	315																	
	Y315L2-8	110	386	508	508	355	630	4-φ28	$\frac{1590}{368}$	$\frac{510}{355}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1000}{900}$	$\frac{400}{420}$	$\frac{660}{678}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{12-\phi 26}{\phi 310}$	$\frac{\phi 200}{\phi 360}$	4-φ14
200YZJ-A63	Y315M-8	75	386	457	508	315																	
	Y355-6	250	525	900	630	355																	
	Y355-6	220	525	900	630	355																	
	Y355M1-6	160	424	560	610	355																	
	Y315L2-8	110	386	508	508	355	630	4-φ28	$\frac{1590}{368}$	$\frac{510}{355}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1000}{900}$	$\frac{400}{420}$	$\frac{660}{678}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{12-\phi 26}{\phi 310}$	$\frac{\phi 200}{\phi 360}$	4-φ14
200YZJ-A65	Y315M-8	75	386	457	508	315																	
	Y355-6	250	525	900	630	355																	
	Y355M2-6	185	424	560	610	355																	
	Y355M1-8	132	424	560	610	355	630	4-φ28															
	Y315L2-8	110	386	508	508	315	630	4-φ28															
200YZJ-A68	Y315L1-8	90	386	508	508	315	630	4-φ28	$\frac{1590}{368}$	$\frac{510}{355}$	$\frac{157}{157}$	$\frac{271}{200}$	$\frac{1050}{950}$	$\frac{400}{420}$	$\frac{710}{730}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 350}$	$\frac{\phi 250}{\phi 390}$	$\frac{24}{36}$	$\frac{12-\phi 26}{\phi 310}$	$\frac{\phi 200}{\phi 360}$	4-φ14
	Y400-6	315	545	1000	710	400	700	4-φ35															
	Y355-6	250	525	900	630	355	630	4-φ28															
	Y355M3-6	200	424	560	610	355	630	4-φ28															

注：配用其它型号电机，应将电机部分安装尺寸作相应更动。
 NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOSTOR USED SHOULD BE ACCORDINGLY MODIFIED.

直联传动安装尺寸2 (单独底座)
INSTALLATION SIZES OF DIRECTLY-COUPLED2 (SINGLE BASE)

项目 ITEM		电动机 MOTORS		L8	L9	B5	H3	H6	n-φ4	$\frac{L}{L1}$	$\frac{L2}{L3}$	$\frac{L4}{L5}$	$\frac{L6}{L7}$	$\frac{B1}{B2}$	$\frac{B3}{B4}$	$\frac{H1}{H2}$	$\frac{H4}{H5}$	$\frac{f}{n-\phi 3}$	$\frac{n-\phi 1}{d1}$	$\frac{b1}{c1}$	$\frac{\delta 1}{\delta 2}$	$\frac{n-\phi 2}{d2}$	$\frac{b2}{c2}$	n-φ5
型号 TYPE	型号 TYPE	功率(KW) POWER																						
200YZJ-A70	Y355M1-8	132	424	560	610	355	630	4-φ28																
	Y315L1-8	90	386	508	508	315	630	4-φ28	1590	510	157	271	1050	420	710	800	6	12-φ23	φ250	24	12-φ26	φ200	4-φ14	
	Y400-6	315	545	1000	710	400	700	4-φ35	368	355	157	200	950	420	730	300	4-φ40	φ350	φ390	36	φ310	φ360		
	Y400-6	280	545	1000	710	400	700	4-φ35																
	Y355M3-6	200	424	560	610	355	630	4-φ28																
200YZJ-A73	Y355M2-8	160	424	560	610	355	630	4-φ28																
	Y355M1-8	132	424	560	610	355	630	4-φ28																
	Y315L2-8	110	386	508	508	315	630	4-φ28	1753	640	125	257	1120	440	650	800	6	12-φ23	φ250	30	12-φ25	φ200	4-φ14	
	Y400-6	355	545	1000	710	400	700	4-φ35	374	323	125	240	1020	500	783	300	4-φ40	φ355	φ405	32	φ310	φ360		
	Y400-6	315	545	1000	710	400	700	4-φ35																
Y355-6	250	525	900	630	355	630	4-φ28																	
200YZJ-A75	Y355M2-8	160	424	560	610	355	630	4-φ28																
	Y355M1-8	132	424	560	610	355	630	4-φ28	1753	640	125	257	1120	440	650	800	6	12-φ23	φ250	30	12-φ25	φ200	4-φ14	
	Y315L2-8	110	386	508	508	315	630	4-φ28	374	323	125	240	1020	500	783	300	4-φ40	φ355	φ405	32	φ310	φ360		
	Y400-6	355	545	1000	710	400	700	4-φ35																
	Y355-6	250	525	900	630	355	630	4-φ28																
200YZJ-A85	Y400-8	220	545	1000	710	400	700	4-φ35																
	Y355M2-8	160	424	560	610	355	630	4-φ28	2081	630	230	465	1200	505	900	800	6	12-φ23	φ250	30	12-φ26	φ200	4-φ14	
	Y450-6	560	605	1120	800	450	700	4-φ35	582	447	230	240	1110	500	868	300	4-φ40	φ355	φ405	32	φ310	φ360		
	Y400-6	400	545	1000	710	400	700	4-φ35																
250YZJ-A60	Y315L2-8	110	386	508	508	315	630	4-φ28																
	Y315M-8	75	386	457	508	315	630	4-φ28	1913	630	200	337	1200	410	810	800	6	12-φ23	φ300	34	12-φ25	φ250	4-φ14	
	Y400-6	280	545	1000	710	400	700	4-φ35	454	392	170	240	1110	500	748	300	4-φ40	φ410	φ460	32	φ355	φ405		
	Y355L2-6	250	424	630	610	355	630	4-φ28																
	Y355M2-6	185	424	560	610	355	630	4-φ28																
250YZJ-A63	Y355M1-8	132	424	560	610	355	630	4-φ28																
	Y315L2-8	110	386	508	508	315	630	4-φ28																
	Y315L1-8	90	386	508	508	315	630	4-φ28	1913	630	200	337	1200	410	810	800	6	12-φ23	φ300	34	12-φ25	φ250	4-φ14	
	Y400-6	315	545	1000	710	400	700	4-φ35	454	392	170	240	1110	500	748	300	4-φ40	φ410	φ460	32	φ355	φ405		
	Y355-6	250	525	900	630	355	630	4-φ28																
Y355-6	200	525	900	630	355	630	4-φ28																	
250YZJ-A65	Y355M1-8	132	424	560	610	355	630	4-φ28																
	Y315L1-8	90	386	508	508	315	630	4-φ28	1913	630	200	337	1200	410	810	800	6	12-φ23	φ300	34	12-φ25	φ250	4-φ14	
	Y400-6	315	545	1000	710	400	700	4-φ35	454	392	170	240	1110	500	748	300	4-φ40	φ410	φ460	32	φ355	φ405		
	Y400-6	280	545	1000	710	400	700	4-φ35																
	Y355-6	220	525	900	630	355	630	4-φ28																

注：配用其它型号电机，应将电机部分安装尺寸作相应更动。

NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOTOR USED SHOULD BE ACCORDINGLY MODIFIED.

项目ITEM		电动机MOTORS							L	L2	L4	L6	B1	B3	H1	H4	f	n-φ1	b1	δ1	n-φ2	b2	n-φ5
		L8	L9	B5	H3	H6	n-φ4	L1	L3	L5	L7	B2	B4	H2	H5	n-φ3	d1	e1	δ2	d2	e2		
型号TYPE	型号TYPE	功率(KW)POWER																					
250YZJ-A68	Y355L1-8	185	424	630	610	355	630	4-φ28															
	Y355M2-8	160	424	560	610	355	630	4-φ28															
	Y315L2-8	110	386	508	508	315	630	4-φ28	1913 454	630 392	200 170	337 240	1200 1110	460 500	810 818	800 300	6 4-φ40	12-φ23 φ410	φ300 φ460	34 32	12-φ25 φ355	φ250 φ405	4-φ14
	Y450-6	450	605	1120	800	450	700	4-φ35															
	Y400-6	355	545	1000	710	400	700	4-φ35															
	Y355-6	250	525	900	630	355	630	4-φ28															
250YZJ-A70	Y355L1-8	185	424	630	610	355	630	4-φ28															
	Y355M2-8	160	424	560	610	355	630	4-φ28															
	Y315L2-8	110	386	508	508	315	630	4-φ28	1913 454	630 392	200 170	337 240	1200 1110	460 500	810 818	800 300	6 4-φ40	12-φ23 φ410	φ300 φ460	34 32	12-φ25 φ355	φ250 φ405	4-φ14
	Y450-6	450	605	1120	800	450	700	4-φ35															
	Y400-6	400	545	1000	710	400	700	4-φ35															
	Y400-6	280	545	1000	710	400	700	4-φ35															
250YZJ-A73	Y355L2-8	200	424	630	610	355	630	4-φ28															
	Y355L1-8	185	424	630	610	355	630	4-φ28															
	Y355M1-8	132	424	560	610	355	630	4-φ28	1913 454	630 392	200 170	337 240	1200 1110	460 500	810 818	800 300	6 4-φ40	12-φ23 φ410	φ300 φ460	34 32	12-φ25 φ355	φ250 φ405	4-φ14
	Y450-6	500	605	1120	800	450	700	4-φ35															
	Y400-6	400	545	1000	710	400	700	4-φ35															
	Y400-6	280	545	1000	710	400	700	4-φ35															
250YZJ-A75	Y400-8	220	545	1000	710	400	700	4-φ35															
	Y355L1-8	185	424	630	610	355	630	4-φ28															
	Y355M1-8	132	424	560	610	355	630	4-φ28	1913 454	630 392	200 170	337 240	1200 1110	460 500	810 818	800 300	6 4-φ40	12-φ23 φ410	φ300 φ460	34 32	12-φ25 φ355	φ250 φ405	4-φ14
	Y450-6	560	605	1120	800	450	700	4-φ35															
	Y450-6	450	605	1120	800	450	700	4-φ35															
	Y400-6	315	545	1000	710	400	700	4-φ35															
250YZJ-A78	Y400-8	280	545	1000	710	400	700	4-φ35															
	Y400-8	250	545	1000	710	400	700	4-φ35	1950 454	630 392	200 170	337 240	1200 1110	500 500	810 818	800 300	6 4-φ40	12-φ23 φ410	φ300 φ460	34 32	12-φ25 φ355	φ250 φ405	4-φ14
	Y355L1-8	185	424	630	610	355	630	4-φ28															
	Y450-6	630	605	1120	800	450	700	4-φ35															
	Y450-6	450	605	1120	800	450	700	4-φ35															
	Y400-6	315	545	1000	710	400	700	4-φ35															
250YZJ-A80	Y400-8	280	545	1000	710	400	700	4-φ35															
	Y400-8	200	545	1000	710	400	700	4-φ35	2135 582	630 465	230 230	465 240	1200 1110	520 500	900 898	800 300	6 4-φ40	12-φ26 φ410	φ300 φ460	42 34	12-φ30 φ370	φ250 φ425	4-φ14
	Y500-6	710	725	1250	900	500	800	4-φ42															
	Y450-6	630	605	1120	800	450	700	4-φ35															
	Y450-6	500	605	1120	800	450	700	4-φ35															
250YZJ-A83	Y450-8	315	605	1120	800	450	700	4-φ35															
	Y400-8	280	545	1000	710	400	700	4-φ35															
	Y400-8	220	545	1000	710	400	700	4-φ35	2135 582	630 465	230 230	465 240	1200 1110	520 500	900 898	800 300	6 4-φ40	12-φ26 φ410	φ300 φ460	42 34	12-φ30 φ370	φ250 φ425	4-φ14
	Y500-6	800	725	1250	900	500	800	4-φ42															
	Y500-6	710	725	1250	900	500	800	4-φ42															
	Y450-6	500	605	1120	800	450	700	4-φ35															

注： 配用其它型号电机，应将电机部分安装尺寸作相应更动。
NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOSTOR USED SHOULD BE ACCORDINGLY MODIFIED.



直联传动安装尺寸3（单独底座）
INSTALLATION SIZES OF DIRECTLY-COUPLED3(SINGLE BASE)

项目 ITEM		电动机 MOTORS		L8	L9	B5	H3	H6	n-φ4	$\frac{L}{L1}$	$\frac{L2}{L3}$	$\frac{L4}{L5}$	$\frac{L6}{L7}$	$\frac{B1}{B2}$	$\frac{B3}{B4}$	$\frac{H1}{H2}$	$\frac{H4}{H5}$	$\frac{f}{n-\phi 3}$	$\frac{n-\phi 1}{d1}$	$\frac{b1}{c1}$	$\frac{\delta 1}{\delta 2}$	$\frac{n-\phi 2}{d2}$	$\frac{b2}{c2}$	n-φ5
型号 TYPE	型号 TYPE	功率(KW) POWER																						
250YZJ-A85	Y450-8	315	605	1120	800	450	700	4-φ35																
	Y400-8	220	545	1000	710	400	700	4-φ35	$\frac{2135}{582}$	$\frac{630}{465}$	$\frac{230}{230}$	$\frac{465}{240}$	$\frac{1200}{1110}$	$\frac{520}{500}$	$\frac{900}{898}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 26}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	$\frac{42}{34}$	$\frac{12-\phi 30}{\phi 370}$	$\frac{\phi 250}{\phi 425}$	4-φ14	
	Y500-6	800	725	1250	900	500	800	4-φ42																
	Y500-6	710	725	1250	900	500	800	4-φ42																
	Y450-6	560	605	1120	800	450	700	4-φ35																
250YZJ-A90	Y450-10	250	605	1120	800	450	700	4-φ35																
	Y450-10	200	605	1120	800	450	700	4-φ35																
	Y355L2-10	160	424	630	610	355	630	4-φ28	$\frac{2135}{450}$	$\frac{630}{594}$	$\frac{372}{108}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{565}{500}$	$\frac{1060}{948}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 26}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	$\frac{42}{34}$	$\frac{12-\phi 30}{\phi 370}$	$\frac{\phi 250}{\phi 425}$	4-φ14	
	Y450-8	450	605	1120	800	450	700	4-φ35																
	Y450-8	400	605	1120	800	450	700	4-φ35																
	Y450-8	315	605	1120	800	450	700	4-φ35																
250YZJ-A96	Y450-10	280	605	1120	800	450	700	4-φ35																
	Y450-10	250	605	1120	800	450	700	4-φ35																
	Y450-10	185	605	1120	800	450	700	4-φ35	$\frac{2135}{450}$	$\frac{630}{594}$	$\frac{372}{108}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{565}{500}$	$\frac{1060}{948}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 26}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	$\frac{42}{34}$	$\frac{12-\phi 30}{\phi 370}$	$\frac{\phi 250}{\phi 425}$	4-φ14	
	Y500-8	560	725	1250	900	500	800	4-φ42																
	Y450-8	450	605	1120	800	450	700	4-φ35																
	Y450-8	355	605	1120	800	450	700	4-φ35																
250YZJ-A103	Y450-10	355	605	1120	800	450	700	4-φ35																
	Y450-10	280	605	1120	800	450	700	4-φ35																
	Y450-10	250	605	1120	800	450	700	4-φ35	$\frac{2135}{450}$	$\frac{630}{594}$	$\frac{372}{108}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{604}{500}$	$\frac{1060}{983}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 26}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	$\frac{42}{34}$	$\frac{12-\phi 30}{\phi 370}$	$\frac{\phi 250}{\phi 425}$	4-φ14	
	Y500-8	710	725	1250	900	500	800	4-φ42																
	Y500-8	560	725	1250	900	500	800	4-φ42																
	Y450-8	450	605	1120	800	450	700	4-φ35																
300YZJ-A56	Y315L2-8	110	386	508	508	315	630	4-φ28																
	Y315M-8	75	386	457	508	315	630	4-φ28	$\frac{1936}{453}$	$\frac{630}{409}$	$\frac{200}{170}$	$\frac{336}{240}$	$\frac{1200}{1110}$	$\frac{400}{500}$	$\frac{810}{748}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 23}{\phi 445}$	$\frac{\phi 350}{\phi 485}$	$\frac{30}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14	
	Y355L2-6	250	424	630	610	355	630	4-φ28																
	Y355M2-6	185	424	560	610	355	630	4-φ28																
300YZJ-A65	Y400-8	220	545	1000	710	400	700	4-φ35																
	Y355L2-8	200	424	630	610	355	630	4-φ28	$\frac{1931}{437}$	$\frac{630}{415}$	$\frac{200}{170}$	$\frac{320}{240}$	$\frac{1200}{1110}$	$\frac{470}{500}$	$\frac{810}{758}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 23}{\phi 460}$	$\frac{\phi 350}{\phi 500}$	$\frac{30}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14	
	Y355M2-8	160	424	560	610	355	630	4-φ28																
	Y450-6	500	605	1120	800	450	700	4-φ35																
	Y450-6	400	605	1120	800	450	700	4-φ35																
300YZJ-A70	Y400-8	250	545	1000	710	400	700	4-φ35																
	Y355L1-8	185	424	630	610	355	630	4-φ28	$\frac{1931}{437}$	$\frac{630}{415}$	$\frac{200}{170}$	$\frac{320}{240}$	$\frac{1200}{1110}$	$\frac{470}{500}$	$\frac{810}{758}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 23}{\phi 460}$	$\frac{\phi 350}{\phi 500}$	$\frac{30}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14	
	Y450-6	630	605	1120	800	450	700	4-φ35																
	Y450-6	450	605	1120	800	450	700	4-φ35																

注：配用其它型号电机，应将电机部分安装尺寸作相应更动。
NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOSTOR USED SHOULD BE ACCORDINGLY MODIFIED.

项目ITEM 型号TYPE	电动机MOTORS		L8	L9	B5	H3	H6	n-φ4	$\frac{L}{L_1}$	$\frac{L_2}{L_3}$	$\frac{L_4}{L_5}$	$\frac{L_6}{L_7}$	$\frac{B_1}{B_2}$	$\frac{B_3}{B_4}$	$\frac{H_1}{H_2}$	$\frac{H_4}{H_5}$	$\frac{f}{n-\phi 3}$	$\frac{n-\phi 1}{d_1}$	$\frac{b_1}{e_1}$	$\frac{\delta_1}{\delta_2}$	$\frac{n-\phi 2}{d_2}$	$\frac{b_2}{e_2}$	n-φ5
	型号TYPE	功率(KW)POWER																					
300YZJ-A85	Y450-10	250	605	1120	800	450	700	4-φ35															
	Y450-10	220	605	1120	800	450	700	4-φ35															
	Y355L2-10	160	424	630	610	355	630	4-φ28	$\frac{2151}{450}$	$\frac{630}{605}$	$\frac{372}{108}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{560}{500}$	$\frac{1060}{928}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 460}$	$\frac{\phi 350}{\phi 500}$	$\frac{34}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14
	Y450-8	450	605	1120	800	450	700	4-φ35															
	Y450-8	315	605	1120	800	450	700	4-φ35															
300YZJ-A90	Y450-10	280	605	1120	800	450	700	4-φ35															
	Y450-10	185	605	1120	800	450	700	4-φ35	$\frac{2151}{450}$	$\frac{630}{605}$	$\frac{372}{108}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{560}{500}$	$\frac{1060}{928}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{12-\phi 23}{\phi 460}$	$\frac{\phi 350}{\phi 500}$	$\frac{34}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14
	Y550-8	500	725	1250	900	500	800	4-φ42															
	Y450-8	355	605	1120	800	450	700	4-φ35															
300YZJ-A95	Y450-12	220	605	1120	800	450	700	4-φ35															
	Y450-12	185	605	1120	800	450	700	4-φ35	$\frac{2208}{635}$	$\frac{630}{470}$	$\frac{240}{240}$	$\frac{518}{240}$	$\frac{1190}{1100}$	$\frac{610}{500}$	$\frac{1080}{978}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 25}{\phi 515}$	$\frac{\phi 400}{\phi 565}$	$\frac{36}{34}$	$\frac{12-\phi 26}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14
	Y500-10	400	725	1250	900	500	800	4-φ42															
	Y450-10	280	605	1120	800	450	800	4-φ35															
300YZJ-A100	Y450-12	250	605	1120	800	450	700	4-φ35															
	Y450-12	185	605	1120	800	450	700	4-φ35	$\frac{2208}{635}$	$\frac{630}{470}$	$\frac{240}{240}$	$\frac{518}{240}$	$\frac{1190}{1100}$	$\frac{610}{500}$	$\frac{1080}{978}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 25}{\phi 515}$	$\frac{\phi 400}{\phi 565}$	$\frac{36}{34}$	$\frac{12-\phi 26}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14
	Y500-10	450	725	1250	900	500	800	4-φ42															
	Y450-10	315	605	1120	800	450	700	4-φ35															
350YZJ-A80	Y4502-8	355	605	1120	800	450	700	4-φ35	$\frac{2151}{450}$	$\frac{630}{605}$	$\frac{230}{230}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{560}{500}$	$\frac{1060}{928}$	$\frac{800}{220}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 23}{\phi 460}$	$\frac{\phi 350}{\phi 500}$	$\frac{36}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14
	Y5001-10	400	605	1120	800	450	700	4-φ35															
	Y5005-12	560	725	1250	900	500	800	4-φ42															
350YZJ-A85	Y5003-10	500	725	1250	900	500	800	4-φ42	$\frac{2151}{450}$	$\frac{630}{605}$	$\frac{372}{108}$	$\frac{333}{240}$	$\frac{1200}{1110}$	$\frac{560}{500}$	$\frac{1060}{928}$	$\frac{800}{220}$	$\frac{6}{4-\phi 40}$	$\frac{16-\phi 23}{\phi 460}$	$\frac{\phi 350}{\phi 500}$	$\frac{36}{34}$	$\frac{12-\phi 25}{\phi 410}$	$\frac{\phi 300}{\phi 460}$	4-φ14
	Y5005-10	630	725	1250	900	500	800	4-φ42															
	Y6302-12	800	830	1600	1120	630	800	4-φ48															
350YZJ-C100	Y5005-10	630	725	1250	900	500	800	4-φ42	$\frac{2476}{496}$	$\frac{1056}{373}$	$\frac{60}{60}$	$\frac{379}{240}$	$\frac{1190}{1070}$	$\frac{635}{500}$	$\frac{1060}{1110}$	$\frac{800}{220}$	$\frac{6}{4-\phi 40}$	$\frac{20-\phi 30}{\phi 585}$	$\frac{\phi 450}{\phi 640}$	$\frac{42}{42}$	$\frac{16-\phi 33}{\phi 490}$	$\frac{\phi 350}{\phi 555}$	4-φ14
	Y6301-12	710	830	1600	1120	630	800	4-φ48															
	Y5602-10	800	800	1400	1000	560	800	4-φ42															
350YZJ-F100	Y500-12	315	725	1250	900	500	800	4-φ42															
	Y450-12	220	605	1120	800	450	700	4-φ35	$\frac{2225}{635}$	$\frac{630}{478}$	$\frac{240}{240}$	$\frac{518}{240}$	$\frac{1190}{1100}$	$\frac{672}{500}$	$\frac{1080}{1028}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{20-\phi 26}{\phi 565}$	$\frac{\phi 450}{\phi 615}$	$\frac{36}{34}$	$\frac{12-\phi 25}{\phi 470}$	$\frac{\phi 350}{\phi 520}$	4-φ14
	Y500-10	560	725	1250	900	500	800	4-φ42															
	Y500-10	500	725	1250	900	500	800	4-φ42															
350YZJ-C104	Y450-10	355	605	1120	800	450	700	4-φ35															
	Y5003-10	500	725	1250	900	500	800	4-φ42															
	Y5603-12	630	800	1400	1000	560	800	4-φ42	$\frac{2395}{496}$	$\frac{1056}{310}$	$\frac{60}{60}$	$\frac{379}{240}$	$\frac{1190}{1070}$	$\frac{754}{580}$	$\frac{1060}{1118}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{20-\phi 25}{\phi 460}$	$\frac{\phi 500}{\phi 620}$	$\frac{42}{42}$	$\frac{16-\phi 26}{\phi 410}$	$\frac{\phi 400}{\phi 525}$	4-φ14
	Y6301-12	710	830	1600	1120	630	800	4-φ48															
400YZJ-F110	Y6303-12	900	830	1600	1120	630	800	4-φ48															
	Y560-12	630	800	1400	1000	560	800	4-φ40	$\frac{2395}{496}$	$\frac{1056}{310}$	$\frac{60}{60}$	$\frac{379}{240}$	$\frac{1190}{1070}$	$\frac{754}{580}$	$\frac{1060}{1118}$	$\frac{800}{300}$	$\frac{6}{4-\phi 40}$	$\frac{20-\phi 25}{\phi 460}$	$\frac{\phi 500}{\phi 620}$	$\frac{42}{42}$	$\frac{16-\phi 26}{\phi 410}$	$\frac{\phi 400}{\phi 525}$	4-φ14
	Y630-10	800	830	1600	1120	630	800	4-φ45															
	Y630-12	900	830	1600	1120	630	800	4-φ45															

直联传动安装尺寸2 (共同底座)
INSTALLATION SIZES OF DIRECTLY-COUPLED2(COMMON BASE)

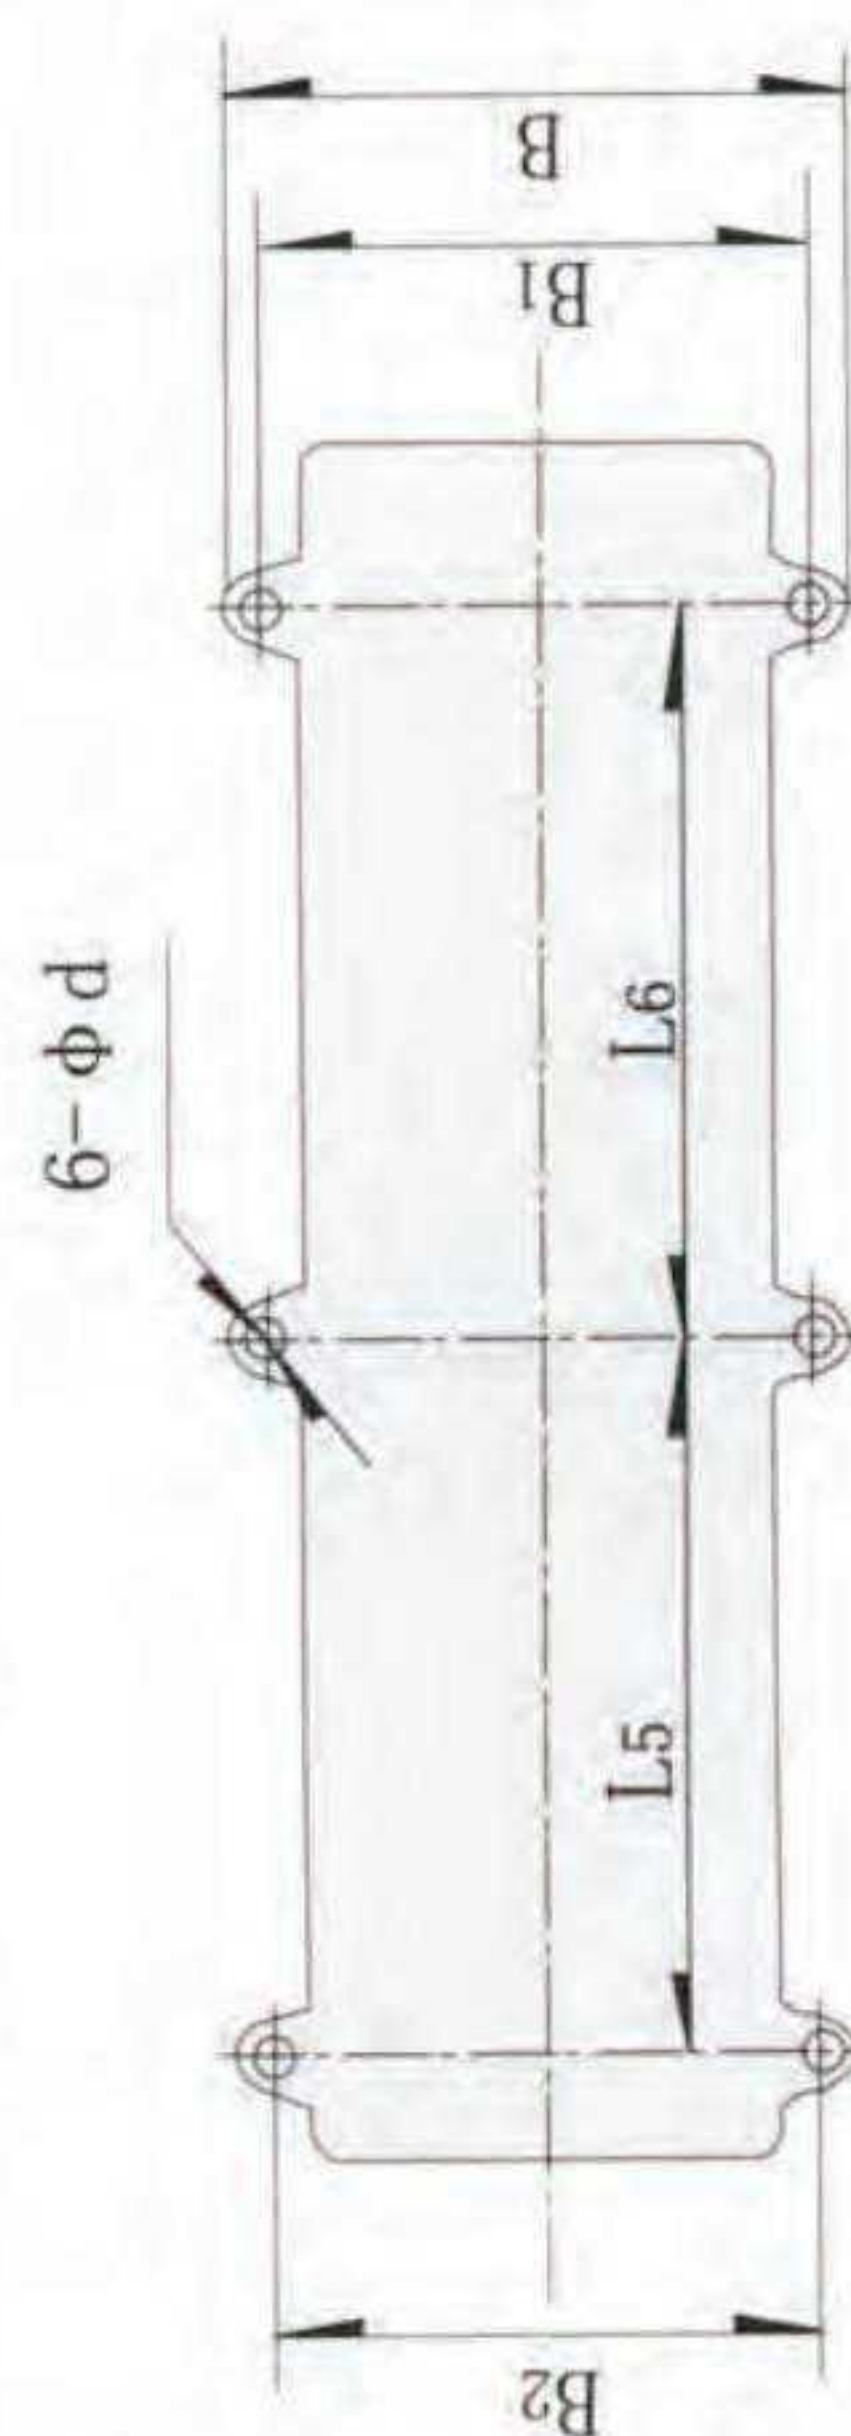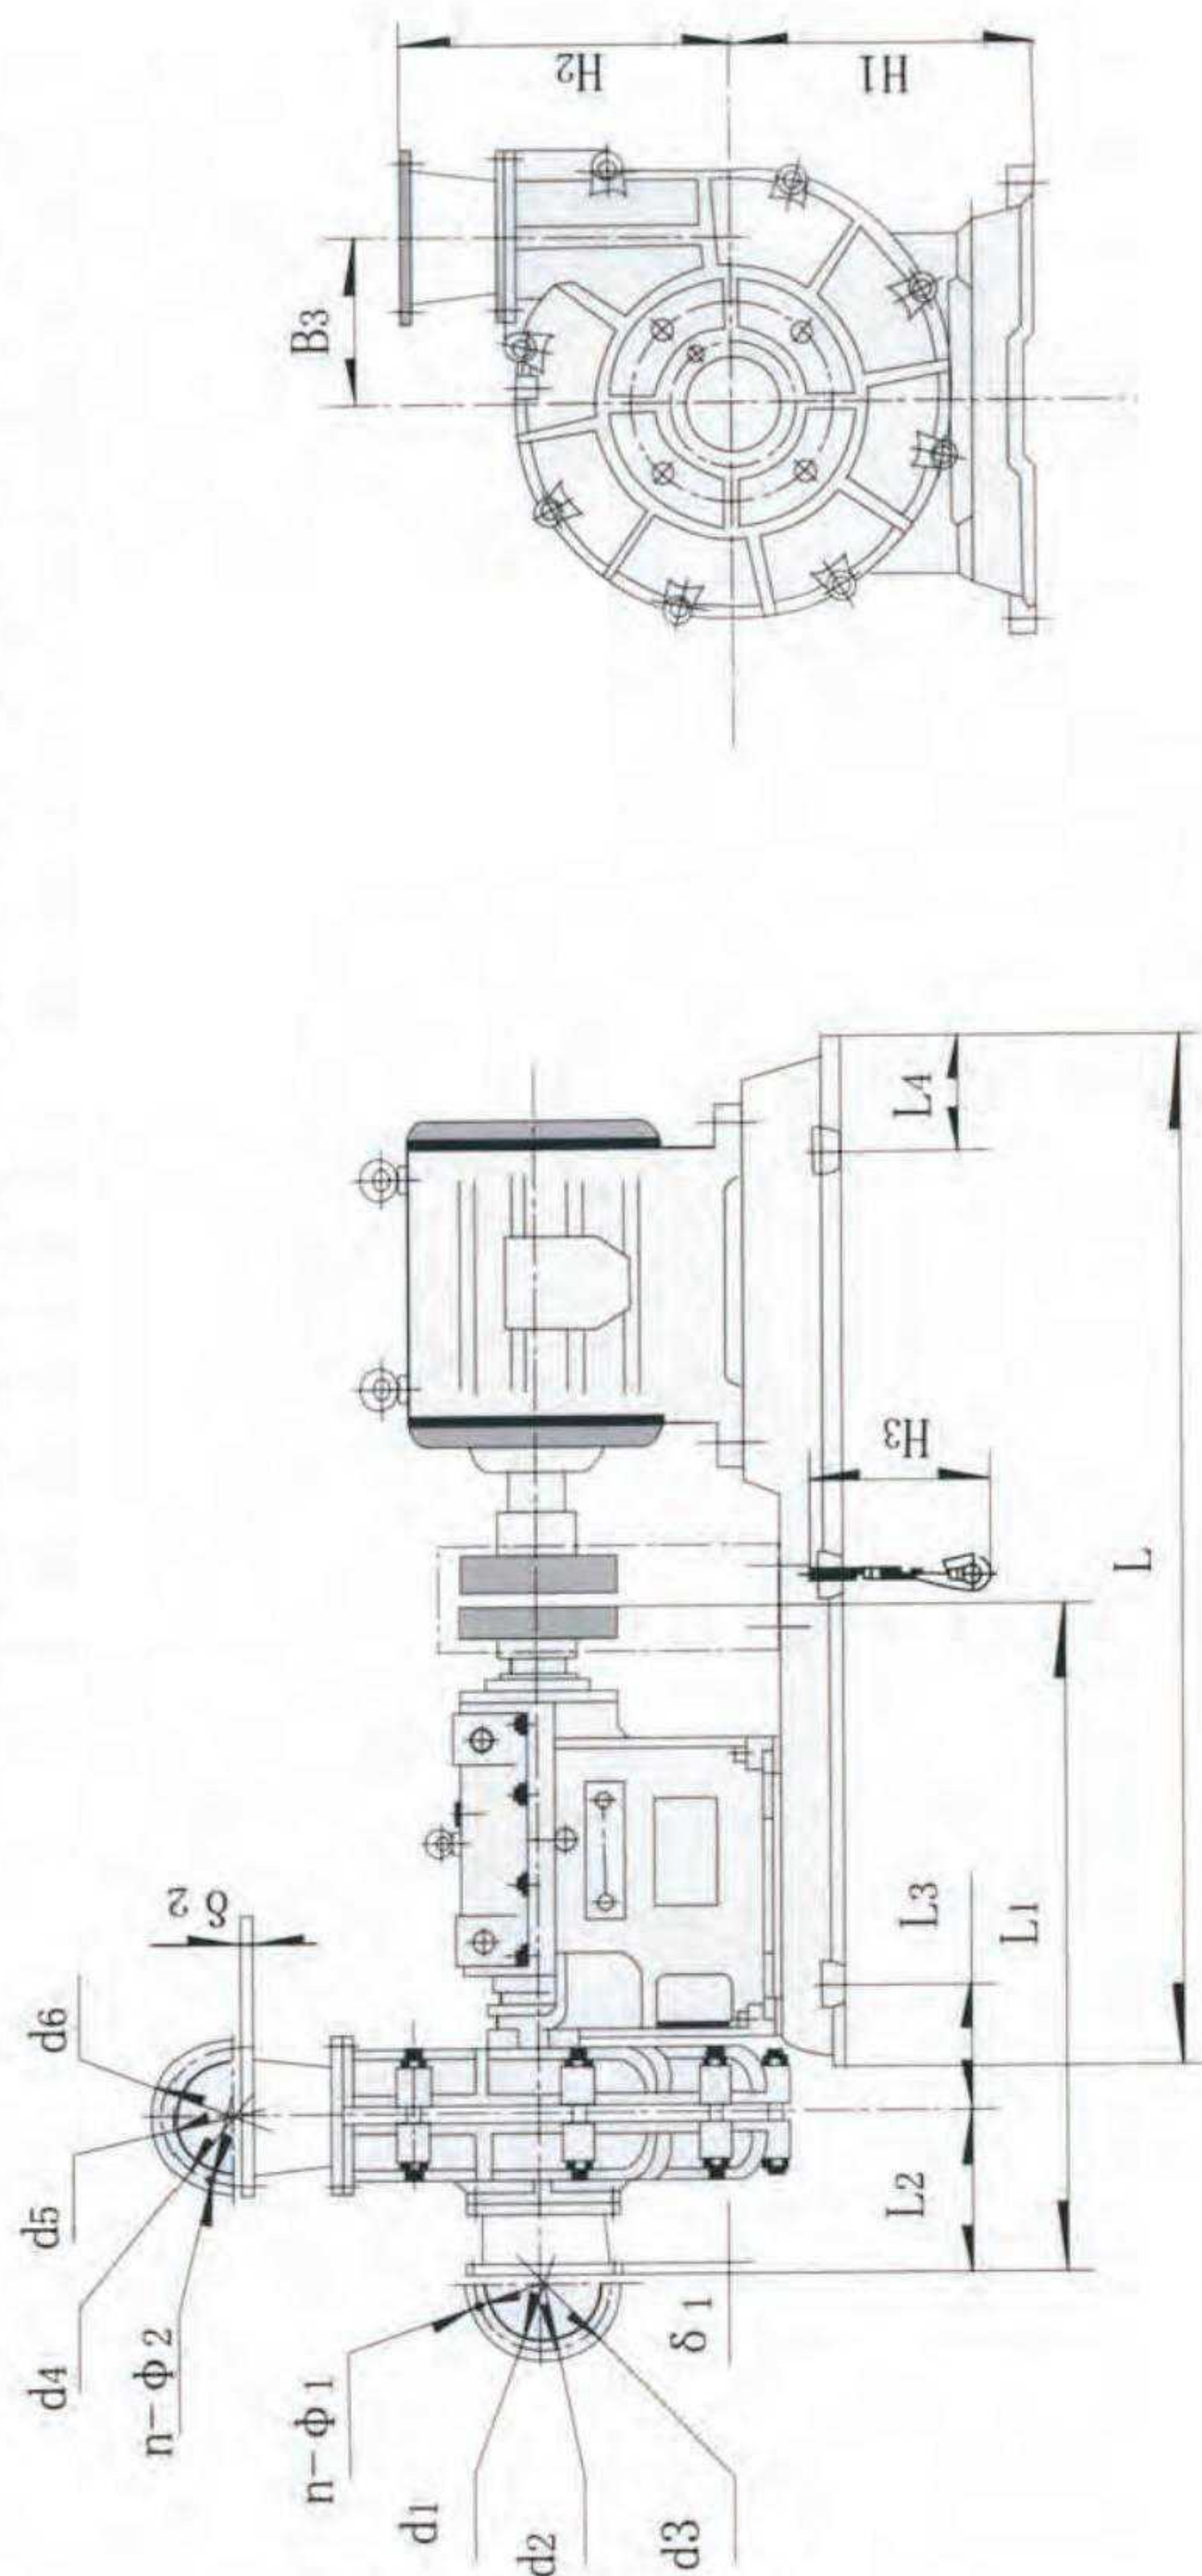

直联传动安装尺寸1（共同底座）
 INSTALLATION SIZES OF DIRECTLY-COUPLED1 (COMMON BASE)

项目ITEM 型号TYPE	电动机MOTORS		L	L1	L2	L3	L4	L5	L6	B	B1	B2	B3	H1	H2	H3	$\frac{n-\phi 1}{n-\phi 2}$	$\frac{d1}{d4}$	$\frac{d2}{d5}$	$\frac{d3}{d6}$	$\frac{\delta 1}{\delta 2}$	6-φd
	型号 TYPE	功率(kw)POWER																				
40YZJ-A17	Y90S-4	1.1	600	591	95	146	30	270	270	260	200	200	100	230	185	300						6-φ14
	Y801-4	0.55	600	591	95	146	30	270	270	260	200	200	100	230	185	300	$\frac{4-\phi 12}{4-\phi 12}$	$\frac{\phi 40}{\phi 40}$	$\frac{\phi 100}{\phi 100}$	$\frac{\phi 125}{\phi 125}$	$\frac{19}{19}$	
	Y132S2-2	7.5	740	591	95	146	30	340	340	260	200	200	100	230	185	300	$\frac{4-\phi 12}{4-\phi 12}$	$\frac{\phi 40}{\phi 40}$	$\frac{\phi 100}{\phi 100}$	$\frac{\phi 125}{\phi 125}$	$\frac{19}{19}$	
	Y132S1-2	5.6	740	591	95	146	30	340	340	260	200	200	100	230	185	300						
40YZJ-A19	Y100L1-4	2.2	740	596	99	149	90	280	280	450	400	400	112	230	200	300	$\frac{4-\phi 14}{4-\phi 12}$	$\frac{\phi 50}{\phi 40}$	$\frac{\phi 110}{\phi 100}$	$\frac{\phi 140}{\phi 125}$	$\frac{16}{19}$	6-φ14
	Y90L-4	1.5	740	596	99	149	90	280	280	450	400	400	112	230	200	300	$\frac{4-\phi 12}{4-\phi 12}$	$\frac{\phi 40}{\phi 40}$	$\frac{\phi 100}{\phi 100}$	$\frac{\phi 125}{\phi 125}$	$\frac{19}{19}$	
	Y160M1-2	11	905	596	99	149	90	360	360	450	400	400	112	230	200	300						
50YZJ-A33	Y132M2-6	5.5	1140	968	259	196	100	470	470	650	580	580	200	365	428	500						6-φ27
	Y132M1-6	4	1140	968	259	196	100	470	470	650	580	580	200	365	428	500	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 80}{\phi 50}$	$\frac{\phi 155}{\phi 145}$	$\frac{\phi 190}{\phi 180}$	$\frac{21}{23}$	
	Y180M-4	18.5	1140	968	259	196	100	470	470	650	580	580	200	365	428	500	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 80}{\phi 50}$	$\frac{\phi 155}{\phi 145}$	$\frac{\phi 190}{\phi 180}$	$\frac{21}{23}$	
	Y160L-4	15	1140	968	259	196	100	470	470	650	580	580	200	365	428	500						
50YZJ-A46	Y200L1-6	18.5	1385	1171	295	239	103	590	590	760	680	680	258	490	503	630						6-φ30
	Y180L-6	15	1355	1171	295	243	102	575	575	760	680	680	258	490	503	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 80}{\phi 50}$	$\frac{\phi 155}{\phi 145}$	$\frac{\phi 200}{\phi 180}$	$\frac{22}{22}$	
	Y250M-4	55	1555	1171	295	232	128	650	650	760	680	680	258	490	503	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 80}{\phi 50}$	$\frac{\phi 155}{\phi 145}$	$\frac{\phi 200}{\phi 180}$	$\frac{22}{22}$	
	Y225M-4	45	1452	1171	295	238	101	625	625	760	680	680	258	490	503	630						
50YZJ-A50	Y225M1-6	30	1675	1223	245	300	110	712	712	822	742	680	273	540	475	630						6-φ30
	Y200L2-6	22	1675	1223	245	300	110	712	712	822	742	680	273	540	475	630	$\frac{8-\phi 18}{4-\phi 18}$	$\frac{\phi 80}{\phi 50}$	$\frac{\phi 169}{\phi 125}$	$\frac{\phi 200}{\phi 165}$	$\frac{20}{20}$	
	Y280M-4	90	1780	1223	245	330	180	710	710	900	820	730	273	540	475	630	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 80}{\phi 50}$	$\frac{\phi 169}{\phi 125}$	$\frac{\phi 200}{\phi 165}$	$\frac{20}{20}$	
	Y280S-4	75	1780	1223	245	330	180	710	710	900	820	730	273	540	475	630						
65YZJ-A27	Y132M1-6	4	1140	976	267	196	100	470	470	650	580	580	160	365	452	500	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 100}{\phi 65}$	$\frac{\phi 170}{\phi 45}$	$\frac{\phi 205}{\phi 180}$	$\frac{21}{23}$	6-φ27
	Y132S-6	3	1140	976	267	196	100	470	470	650	580	580	160	365	452	500	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 100}{\phi 65}$	$\frac{\phi 170}{\phi 45}$	$\frac{\phi 205}{\phi 180}$	$\frac{21}{23}$	
	Y160M-4	11	1140	976	267	196	100	470	470	650	580	580	160	365	452	500						
65YZJ-A30	Y132M2-6	5.5	1140	976	267	196	100	470	470	650	580	580	160	365	452	500						6-φ27
	Y132M1-6	4	1140	976	267	196	100	470	470	650	580	580	160	365	452	500	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 100}{\phi 65}$	$\frac{\phi 170}{\phi 45}$	$\frac{\phi 205}{\phi 180}$	$\frac{21}{23}$	
	Y160L-4	15	1140	976	267	196	100	470	470	650	580	580	160	365	452	500	$\frac{4-\phi 18}{4-\phi 18}$	$\frac{\phi 100}{\phi 65}$	$\frac{\phi 170}{\phi 45}$	$\frac{\phi 205}{\phi 180}$	$\frac{21}{23}$	
	Y160M-4	11	1140	976	267	196	100	470	470	650	580	580	160	365	452	500						
80YZJ-A33	Y160L-6	11	1355	1156	283	240	102	575	575	760	680	680	215	490	468	630						6-φ30
	Y160M-6	7.5	1355	1156	283	240	102	575	575	760	680	680	215	490	468	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	
	Y225S-4	37	1452	1156	283	235	101	625	625	760	680	680	215	490	468	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	
	Y200L-4	30	1385	1156	283	236	103	590	590	760	680	680	215	490	468	630						
80YZJ-A36	Y180L-6	15	1355	1156	283	240	102	575	575	760	680	680	215	490	468	630						6-φ30
	Y160L-6	11	1355	1156	283	240	102	575	575	760	680	680	215	490	468	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	
	Y225M-4	45	1452	1156	283	235	101	625	625	760	680	680	215	490	468	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	
	Y225S-4	37	1452	1156	283	235	101	625	625	760	680	680	215	490	468	630						
	Y200L-4	30	1385	1156	283	236	103	590	590	760	680	680	215	490	468	630						

注： 配用其它型号电机，应将电机部分安装尺寸作相应更动。
 NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOSTOR USED SHOULD BE ACCORDINGLY MODIFIED.

直联传动安装尺寸2（共同底座）
INSTALLATION SIZES OF DIRECTLY-COUPLED1 (COMMON BASE)

项目ITEM 型号TYPE	电动机MOTORS		L	L1	L2	L3	L4	L5	L6	B	B1	B2	B3	H1	H2	H3	$\frac{n-\phi 1}{n-\phi 2}$	$\frac{d1}{d4}$	$\frac{d2}{d5}$	$\frac{d3}{d6}$	$\frac{\delta 1}{\delta 2}$	6- ϕd
	型号TYPE	功率(KW) POWER																				
80YZJ-A39	Y200L1-6	18.5	1385	1157	284	236	103	590	590													
	Y180L-6	15	1355	1157	284	240	102	575	575	760	680	680	240	490	488	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	6- $\phi 30$
	Y250M-4	55	1452	1157	284	235	101	625	625													
	Y225M-4	45	1452	1157	284	235	101	625	625													
80YZJ-A42	Y200L2-6	22	1385	1157	284	236	103	590	590													
	Y200L1-6	18.5	1385	1157	284	236	103	590	590	760	680	680	240	490	488	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	6- $\phi 30$
	Y280S-4	75	1626	1157	284	222	135	700	700													
	Y250M-4	55	1555	1157	284	229	128	650	650													
80YZJ-A52	Y280S-6	45	1675	1337	358	301	110	712	712	822	742											
	Y250M-6	37	1675	1337	358	301	110	712	712	822	742											
	Y225M-6	30	1675	1337	358	301	110	712	712	822	742	680	300	540	548	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 125}{\phi 80}$	$\frac{\phi 200}{\phi 160}$	$\frac{\phi 235}{\phi 195}$	$\frac{20}{20}$	6- $\phi 30$
	Y315L1-4	160	1932	1337	358	351	200	766	766	897	817											
	Y315M-4	132	1832	1337	358	301	150	766	766	897	817											
	Y315S-4	110	1832	1337	358	301	150	766	766	897	817											
100YZJ-A33	Y180L-6	15	1355	1170	290	247	102	575	575													
	Y160L-6	11	1355	1170	290	247	102	575	575													
	Y225M-4	45	1452	1170	290	242	101	625	625	760	680	680	220	490	468	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{20}$	6- $\phi 30$
	Y225S-4	37	1452	1170	290	242	101	625	625													
	Y200L-4	30	1385	1170	290	243	103	590	590													
100YZJ-A36	Y200L1-6	18.5	1385	1170	290	243	103	590	590													
	Y180L-6	15	1355	1170	290	247	102	575	575	760	680	680	220	490	468	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{20}$	6- $\phi 30$
	Y250M-4	55	1555	1170	290	236	128	650	650													
	Y225S-4	37	1452	1170	290	242	101	625	625													
100YZJG-B42	Y200L2-6	22	1385	1156	296	223	103	590	590													
	Y200L1-6	18.5	1385	1156	296	223	103	590	590													
	Y180L-6	15	1355	1156	296	227	102	575	575	760	680	680	248	490	488	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{22}$	6- $\phi 30$
	Y280S-4	75	1626	1156	296	209	135	700	700													
	Y250M-4	55	1555	1156	296	216	128	650	650													
100YZJ-A39	Y225M-4	45	1452	1156	296	222	101	625	625													
	Y225M-6	30	1452	1179	295	246	101	625	625				248									
	Y200L2-6	22	1385	1179	295	247	103	590	590				250									
	Y200L1-6	18.5	1385	1179	295	247	103	590	590	760	680	680	250	490	488	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{20}$	6- $\phi 30$
	Y280S-4	75	1626	1179	295	233	135	700	700				250									
	Y250M-4	55	1555	1179	295	240	128	650	650				250									

注：配用其它型号电机，应将电机部分安装尺寸作相应更动。

NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOTOR USED SHOULD BE ACCORDINGLY MODIFIED.

项目ITEM 型号TYPE	电动机MOTORS		L	L1	L2	L3	L4	L5	L6	B	B1	B2	B3	H1	H2	H3	$\frac{n-\phi 1}{n-\phi 2}$	$\frac{d1}{d4}$	$\frac{d2}{d5}$	$\frac{d3}{d6}$	$\frac{\delta 1}{\delta 2}$	6-φd
	型号 TYPE	功率(KW) POWER																				
100YZJ-A42	Y225M-6	30	1452	1179	295	246	101	625	625	760	680	680	250	490	488	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{20}$	6-φ 30
	Y200L2-6	22	1385	1179	295	247	103	590	590	760	680											
	Y280M-4	90	1626	1179	295	233	135	700	700	760	680											
	Y280S-4	75	1626	1179	295	233	135	700	700	760	680											
100YZJ-B42	Y225M-6	30	1452	1179	295	246	101	625	625	760	680	680	250	490	488	630	$\frac{8-\phi 22}{8-\phi 18}$	$\frac{\phi 200}{\phi 100}$	$\frac{\phi 295}{\phi 180}$	$\frac{\phi 335}{\phi 215}$	$\frac{26}{20}$	6-φ 30
	Y200L2-6	22	1385	1179	295	246	101	625	625	760	680											
	Y280M-4	90	1626	1179	295	233	135	700	700	760	680											
	Y280S-4	75	1626	1179	295	233	135	700	700	760	680											
100YZJ-A46	Y250M-6	37	1675	1349	371	300	110	712	712	822	742	680	280	540	548	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{20}$	6-φ 30
	Y225M-6	30	1675	1349	371	300	110	712	712	822	742											
	Y315M-4	132	1832	1349	371	300	150	766	766	897	817											
	Y315S-4	110	1832	1349	371	300	150	766	766	897	817											
	Y280M-4	90	1675	1349	371	300	110	712	712	822	742											
100YZJ-A50	Y280M-6	55	1675	1349	371	300	110	712	712	822	742	680	280	540	548	630	$\frac{8-\phi 18}{8-\phi 18}$	$\frac{\phi 150}{\phi 100}$	$\frac{\phi 225}{\phi 180}$	$\frac{\phi 260}{\phi 215}$	$\frac{23}{20}$	6-φ 30
	Y280S-6	45	1675	1349	371	300	110	712	712	822	742											
	Y225M-6	30	1675	1349	371	300	110	712	712	822	742											
	Y315L1-4	160	1885	1349	371	300	203	766	766	897	817											
	Y315M-4	132	1832	1349	371	300	150	766	766	897	817											
	Y315S-4	110	1832	1349	371	300	150	766	766	897	817											
150YZJ-C42	Y280S-6	45	1675	1345	330	337	110	712	712	822	742	680	300	540	578	630	$\frac{8-\phi 22}{8-\phi 22}$	$\frac{\phi 200}{\phi 200}$	$\frac{\phi 295}{\phi 295}$	$\frac{\phi 335}{\phi 335}$	$\frac{26}{30}$	6-φ 30
	Y250M-6	37	1675	1345	330	337	110	712	712	822	742											
	Y225M-6	30	1675	1345	330	337	110	712	712	822	742											
	Y315M-4	132	1832	1345	330	337	150	766	766	897	817											
	Y315S-4	110	1832	1345	330	337	150	766	766	897	817											
150YZJ-A48	Y250M-8	30	1675	1351	338	335	110	712	712	822	742	680	300	540	598	630	$\frac{8-\phi 22}{8-\phi 22}$	$\frac{\phi 200}{\phi 200}$	$\frac{\phi 295}{\phi 295}$	$\frac{\phi 335}{\phi 335}$	$\frac{26}{30}$	6-φ 30
	Y225M-8	22	1675	1351	338	335	110	712	712	822	742											
	Y315S-6	75	1832	1351	338	335	150	766	766	897	817											
	Y280M-6	55	1675	1351	338	335	110	712	712	822	742											
150YZJ-A50	Y280S-8	37	1675	1351	376	332	110	712	712	822	742	680	310	540	598	630	$\frac{8-\phi 22}{8-\phi 22}$	$\frac{\phi 200}{\phi 200}$	$\frac{\phi 295}{\phi 295}$	$\frac{\phi 335}{\phi 335}$	$\frac{26}{30}$	6-φ 30
	Y250M-8	30	1675	1351	376	332	110	712	712	822	742											
	Y315M1-6	90	1832	1351	376	332	150	766	766	897	817											
	Y315S-6	75	1832	1351	376	332	150	766	766	897	817											
150YZJ-A50	Y280S-8	37	1675	1351	338	335	110	712	712	822	742	680	300	540	598	630	$\frac{8-\phi 22}{8-\phi 22}$	$\frac{\phi 200}{\phi 200}$	$\frac{\phi 295}{\phi 295}$	$\frac{\phi 335}{\phi 335}$	$\frac{26}{30}$	6-φ 30
	Y250M-8	30	1675	1351	338	335	110	712	712	822	742											
	Y315S-6	75	1832	1351	338	335	150	766	766	897	817											
	Y280M-6	55	1675	1351	338	335	110	712	712	822	742											

注： 配用其它型号电机，应将电机部分安装尺寸作相应更动。
NOTE: IF MOTORS OTHER THAN THOSE AS LISTED ARE USED, THE MOUNTING DIMENSIONS ON THE PART OF THE MOSTOR USED SHOULD BE ACCORDINGLY MODIFIED.

DESHB

注：本样本提供的产品信息仅供参考，由于产品的更新可能您所得到的商品有所不同，敬请谅解。

DESHB
——德士比——

杭州德士比泵有限公司

地址：杭州钱江经济开发区仁良
路289号

邮 编：311107

服务热线：400-666-9600

电 话：86-0571-88006220

传 真：86-0571-88006221

www.dsbpump.com

